

Oracle® WebLogic Server

Creating WebLogic Domains Using the Configuration Wizard

10g Release 3 (10.3)

October 2008

Oracle® WebLogic Server

Oracle® Workshop for WebLogic

Oracle® WebLogic Portal

Oracle® Service Bus

Copyright © 2007, 2008, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

1. Introduction

Introduction to Domains	1-1
Overview of the Configuration Wizard	1-3
About Domain and Extension Templates	1-6
Creating a Domain	1-6
Extending a Domain	1-8
Additional Tools for Creating, Extending, and Managing Domains	1-9

2. Starting the Configuration Wizard

Starting in Graphical Mode	2-1
Starting in Console Mode	2-2

3. Creating a WebLogic Domain

4. Creating an Oracle Service Bus Domain

Create or Extend a Domain	4-2
Select a Domain Source	4-2
Configure an Administrator Username and Password	4-4
Specify the Server Start Mode and JDK	4-4
Choose the Startup Mode	4-5
Differences Between Domain Startup Modes	4-6
Select the JDK for the Domain	4-7
Customize Environment and Services Settings	4-8

Customize the Environment	4-8
Customize Existing JDBC and JMS Settings	4-9
Create the WebLogic Domain	4-10
Creating Domain	4-11

5. Customizing the Environment

Configuring the RDBMS Security Store Database	5-2
Configuring the Administration Server	5-3
Configuring Managed Servers	5-7
Configuring Clusters	5-7
Assigning Managed Servers to Clusters	5-9
Creating HTTP Proxy Applications	5-10
Configuring Machines	5-11
Assigning Servers to Machines	5-13
Review the Domain Settings and Create the Domain	5-14

6. Customizing the Oracle Service Bus Environment

Configure the Administration Server	6-2
Specifying Listen Addresses	6-4
Specifying Listen Ports	6-6
Configure Managed Servers	6-6
Configure Clusters	6-9
Assign Managed Servers to Clusters	6-12
Create HTTP Proxy Applications	6-13
Configure Machines	6-13
Assign Servers to Machines	6-18
Review the Domain Settings	6-19

7. Customizing JDBC and JMS Settings in WebLogic Domains

Configure JDBC Data Sources	7-1
Test Data Source Connections.....	7-5
Run Database Scripts.....	7-5
Configure JMS File Stores.....	7-6

8. Customizing JDBC and JMS Settings in Oracle Service Bus Domains

Configure JDBC Data Sources	8-1
Test Data Source Connections.....	8-7
Run Database Scripts.....	8-7
Configure JMS File Stores.....	8-8
Review the Domain Settings	8-11

9. Extending WebLogic Domains

Choose to Extend a Domain	9-2
Select a WebLogic Domain Directory.....	9-2
Select the Extension Source.....	9-2
Customize JDBC and JMS File Store Settings	9-2
Extend Your WebLogic Domain.....	9-3

10. Extending Oracle Service Bus Domains

Choose to Extend a Domain	10-2
Select an Oracle WebLogic Domain Directory.....	10-2
Select the Extension Source.....	10-2
Customize JDBC and JMS Settings	10-4
Extend Your Oracle WebLogic Domain.....	10-4

11.Examples: Using the Configuration Wizard

Creating a Domain	11-1
Extending an Existing Domain	11-2
Creating a Domain with Managed Servers and Clusters.	11-4

12.How Do I...?

How Do I: Create a WLI Domain Using an Enterprise-Quality Database?	12-1
How Do I: Create a Portal Domain Using an Enterprise-Quality Database?	12-3
How Do I: Create an Oracle Service Bus Domain Using an Enterprise-Quality Database?	12-6

Introduction


This guide provides information about configuring WebLogic Server domains by using the Configuration Wizard.

Introduction to Domains

Note: This section provides a brief introduction to domains. You can skip this section if you are familiar with the primary features of a domain.

A domain is the basic administration unit of WebLogic Server. It consists of one or more WebLogic Server instances, and logically related resources and services that are managed, collectively, as one unit.

Figure 1-1 WebLogic Domain Structure

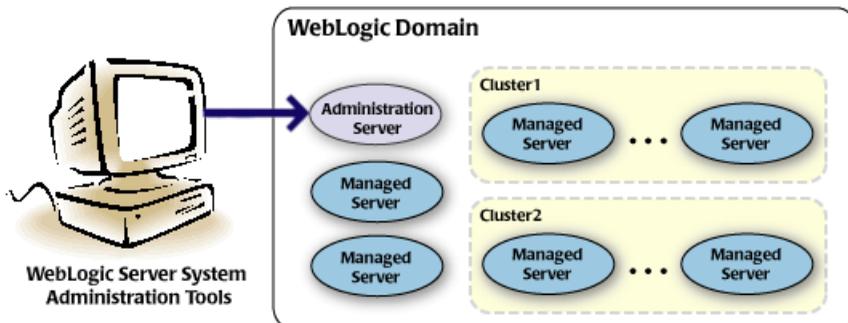

As shown in [Figure 1-1](#), the basic domain infrastructure consists of one Administration Server and optional managed servers and clusters. These components are described in the following table.

Table 1-1 Domain Infrastructure Components

Feature	Description
Administration Server	<p>A domain includes one WebLogic Server instance that is configured as an administration server. The administration server provides a central point for managing the domain and providing access to the WebLogic Server administration tools. These tools include, but are not limited to, the following:</p> <ul style="list-style-type: none"> • WebLogic Server Administration Console: Graphical user interface to the Administration Server • WebLogic Server Node Manager: A Java program that enables you to start and stop server instances—both Administration Servers and Managed Servers—remotely, and to monitor and automatically restart them after an unexpected failure. <p>For more information about the WebLogic Server administration tools, see Summary of System Administration Tools and APIs in <i>Introduction to WebLogic Server and WebLogic Express</i>.</p>
Managed Servers	<p>All other WebLogic Server instances in a domain are called managed servers. Managed servers host application components and resources, which are also deployed and managed as part of the domain. In a domain with only a single WebLogic Server instance, that single server works as both the administration server and managed server.</p>
Clusters	<p>A domain may also include WebLogic Server clusters, which are groups of server instances that work together to provide scalability and high availability for applications. Clusters can improve performance and provide failover, should a server instance become unavailable. The servers within a cluster can either run on the same machine or reside in different machines. To the client, a cluster appears as a single WebLogic Server instance.</p>

Note: All managed servers in a domain must run the same version of WebLogic Server. The administration server can run either the same version as the managed servers in the domain, or a later service pack.

In addition to infrastructure components, a domain defines the basic network configuration for the server instances that it contains. Specifically, a domain defines application deployments, supported application services (such as database and messaging services), security options, and physical host machines.

Domain configuration information is stored in the configuration directories under the domain directory.

Common Domain Configurations

You might find it useful to configure multiple domains based on specific criteria, such as system administrator responsibilities, the logical classification of applications, the geographical locations of servers, or size. The following table outlines the most common domain configurations.

Table 1-2 Common Domain Configurations

Configuration	Description
Domain with managed servers	In typical production environments, several managed servers can host applications, and an administration server performs management operations.
Domain with managed servers and clusters	In production environments that require increased performance, throughput, or availability for an application, several managed servers might be grouped in a cluster. In such a case, the domain consists of one or more clusters with the applications they host, additional managed servers, if necessary, and an administration server to perform management operations.
Stand-alone Server Domain	In development or test environments, a single application and server might be deployed independently without managed servers. In such a case, you can have a domain consisting of a single administration server that also hosts the applications you want to test or develop.

Note: In production environments, it is recommended that you deploy applications only on managed servers; the administration server should be reserved for management tasks.


For more information about WebLogic Server domains, see “Understanding WebLogic Server Domains” in *Understanding Domain Configuration*.

Overview of the Configuration Wizard

Before you can develop and run a WebLogic application, you must first create a domain. The Configuration Wizard (illustrated in [Figure 1-2](#)), simplifies the process of creating and extending a domain. To create or extend a domain by using the Configuration Wizard, you simply select the product components to be included in the domain (or choose a template that best meets your

requirements), and provide basic configuration information. The Configuration Wizard then creates or extends the domain by using the settings from templates. For more information about templates, see [About Domain and Extension Templates](#).

Figure 1-2 Configuration Wizard

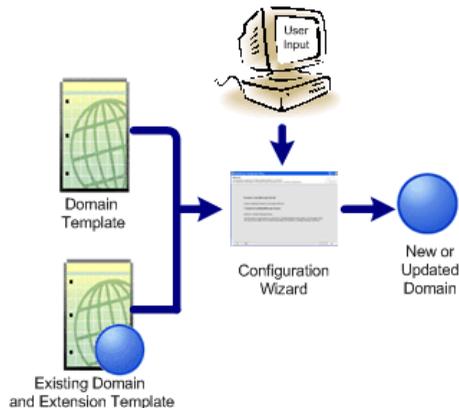

After you create a domain by using the Configuration Wizard, you can start a WebLogic Server instance to run in the domain for developing, testing, and deploying applications.

Note: The Domain Template Builder simplifies the process of creating templates by guiding you through the process of creating custom domain and extension templates. You can use these templates for creating and extending domains by using the Configuration Wizard or the WebLogic Scripting Tool (WLST).

For information about the Domain Template Builder, see [Creating Templates Using the Domain Template Builder](#).

For more information about the WLST, see “Creating Domains Using WLST” in [WebLogic Scripting Tool](#).

Modes of Operation

The Configuration Wizard can be used off-line only; that is, when there is no server running. It supports the following modes of operation:

- Graphical mode—an interactive, GUI-based mode
- Console mode—an interactive, text-based mode

Note: For a scripted, silent-mode method, you can use WLST. For more information, see [WebLogic Scripting Tool](#).

Configuration Wizard Output

A domain created using the Configuration Wizard has the following directories:

- `autodeploy`—provides a location from which you can deploy applications quickly on a development server. When the WebLogic Server instance is running in development mode, it automatically deploys any applications or modules that you place in this directory.
- `bin`—contains scripts to start and stop the administration server, and, optionally, managed servers.
- `config`—contains the following:
 - A domain-specific configuration file, `config.xml`, which specifies the name of the domain and the configuration parameter settings for each server instance, cluster, resource, and service in the domain.
 - Subdirectories that contain the configuration for various system modules: `deployments`, `diagnostics`, `jdbc`, `jms`, `lib`, `nodemanager`, and `security`. These subdirectories contain configuration files that are incorporated, by reference, into the `config.xml` file.

Note: Depending on your configuration, some subdirectories might not exist.
- `console-ext`—contains console extensions used by the administration server.
- `init-info`—contains files used by the Configuration Wizard to support creation and extension of the domain.
- `lib`—contains the domain library. When the server starts, any `jar` files that you place in this directory are added, dynamically, to the end of the server classpath.
- `security`—contains common security files for all the servers in the domain.
- `servers`—contains a subdirectory for each server in the domain. These server subdirectories, in turn, contain subdirectories that hold directories and files that must be different for each server in a domain, such as `bin`, `cache`, `data`, `logs`, `security`, and `tmp`.
- `user_staged_config`—if the domain is configured to be user-staged – that is, the administrator is responsible for staging (copying) the configuration information to the managed servers, this directory provides an alternative to the `config` directory.

If the template used to create a domain includes applications, the application files are located, by default, in `user_projects/applications/domain_name`.

For more information, see [Domain Configuration Files](#).

About Domain and Extension Templates

In the context of the Configuration Wizard, the term template refers to a Java Archive (JAR) file, which contains the files and scripts required to create or extend a domain. The types of templates that can be used by the Configuration Wizard to create or extend domains include:

- Domain template—defines the full set of resources within a domain, including infrastructure components, applications, services, security options, and general environment and operating system options. You can create this type of template from an existing domain by using the Domain Template Builder or the `pack` command. Subsequently, you can create a domain based on the template by using the Configuration Wizard

The product distribution includes a base WebLogic Server domain template. This template defines the core set of resources within a domain, including an administration server and basic configuration information, infrastructure components, and general environment and operating system options. It does not include sample applications. You can use this template to create a basic WebLogic Server domain, which you can then extend with applications and services, or additional product component functionality.

- Extension template—defines applications and services that can provide additional features, such as Apache Beehive, product sample applications, or JDBC or JMS components. This type of template can be used to update an existing domain.
- Managed server template—defines the subset (within a domain) of resources that are required to create a managed server domain on a remote machine. This type of template can be created using the `pack` command.

The product installation includes a set of predefined domain and extension templates. This set includes the base WebLogic Server domain template and various extension templates that allow you to add component features and samples to the base domain. For more information about these templates and how they relate to each other, see [Domain Template Reference](#).

Creating a Domain


The Configuration Wizard guides you through the process of creating a domain for your target environment by selecting the product components that you want to include in your domain, or by using domain templates. If required, you can also customize the domain to suit your environment by adding and configuring managed servers, clusters, and machine definitions, or customizing predefined JDBC data sources, and JMS file store directories.

You might want to customize your domain in the following circumstances:

- To create a multi-server or clustered domain when using the default settings. All the predefined templates delivered with the product create single-server domains.
- To use a database that is different from the default database in the domain or extension template. In this case, you need to customize the JDBC settings to point to the appropriate database.
- To customize the listen port and the SSL port
- To create a test environment using a domain template that you received, and to modify the domain configuration to work in the test environment based on your requirement.

Figure 1-3 summarizes the steps for creating a domain by using the Configuration Wizard.

Figure 1-3 Creating a Domain

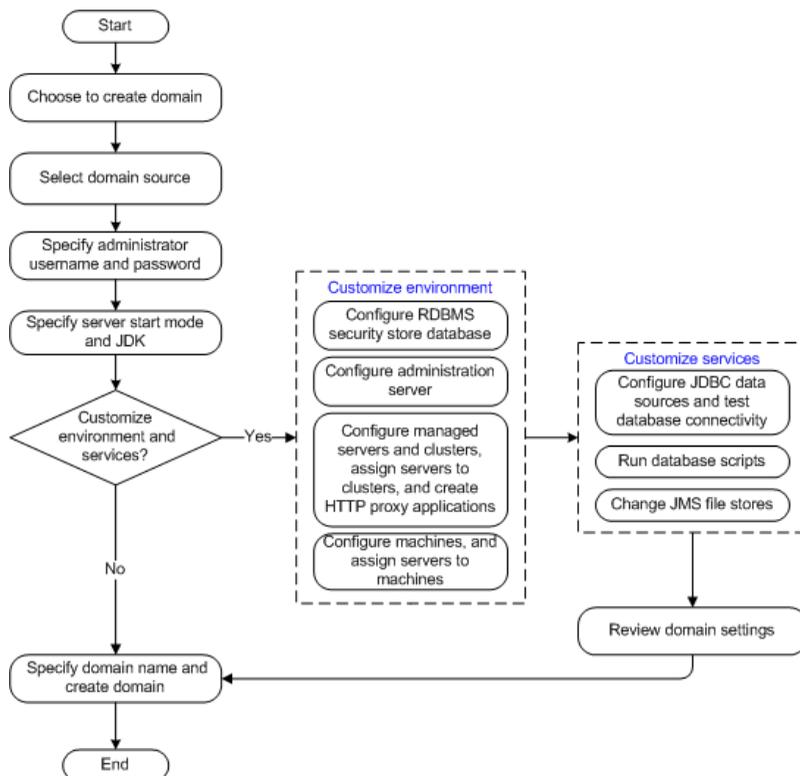


Extending a Domain

You can extend an existing domain by adding predefined applications and services, or additional product component functionality. For example, if you created a base WebLogic Server domain and want to add Workshop, you can extend the domain by using the Workshop extension.

To extend a domain by using the Configuration Wizard, select the domain that you want to extend and then select the additional product component. Alternatively, you can extend an existing domain by specifying an extension template to include additional applications and services. You can also customize the JDBC connections and change the JMS file store. The Configuration Wizard uses your input to update the configuration files, such as `config.xml`, and all other generated components in the domain directory, as required.

Figure 1-4 summarizes the steps for extending a domain by using the Configuration Wizard.

Figure 1-4 Extending a Domain

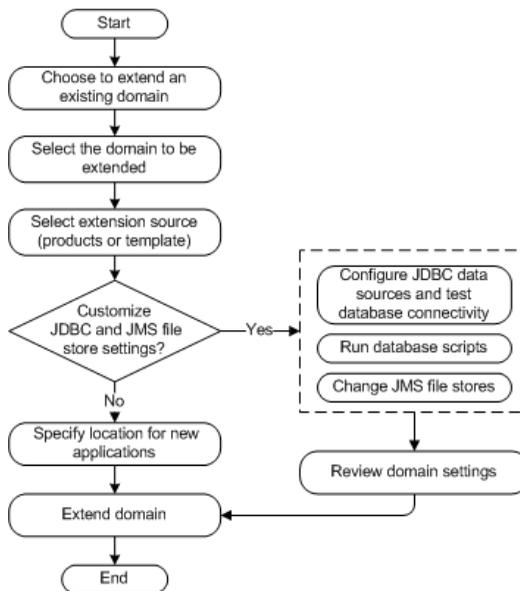

Additional Tools for Creating, Extending, and Managing Domains

As described earlier, you can create and extend domains by using the Configuration Wizard. In addition, you can use the tools listed in [Table 1-3](#) to create, extend, and manage domains. You can also perform run-time configuration by using the consoles of the product components.

Table 1-3 Additional Tools for Creating, Extending, and Managing Domains

To do this...	Use the following tools...
Create a new domain or extend an existing domain	<ul style="list-style-type: none">• WebLogic Scripting Tool (WLST) WLST is a command-line scripting interface, which you can use to interact with and configure WebLogic Server instances and domains. When WLST is offline, it enables you to create a new domain or update an existing domain without connecting to a running WebLogic Server—supporting the same functionality as the Configuration Wizard. For more information, see WebLogic Scripting Tool.• unpack command You can use this command to create a domain from the command line, by using a template that is compatible with your current installation. You cannot use <code>unpack</code> to extend an existing domain. For more information, see Creating Templates and Domains Using the Pack and Unpack Commands.
Add applications and services, or modify existing settings	<ul style="list-style-type: none">• WebLogic Server administration console For more information, see WebLogic Server Administration Console Online Help.• Other system administration tools, such as WLST, weblogic.Admin, JMX, and Ant. For more information, see “Summary of System Administration Tools and APIs” in Introduction to WebLogic Server and WebLogic Express.
Manage and monitor the health and status of the domain	<ul style="list-style-type: none">• WebLogic diagnostic framework For more information, see Configuring and Using the WebLogic Diagnostics Framework.• WebLogic Server administration console For more information, see WebLogic Server Administration Console Online Help.• WebLogic Server node manager For more information, see Managing Server Startup and Shutdown.

Starting the Configuration Wizard

This section describes how to start the Configuration Wizard in graphical and console modes.

- [Starting in Graphical Mode](#)
- [Starting in Console Mode](#)

Starting in Graphical Mode

When run in graphical mode, the Configuration Wizard is executed in a graphical environment.

The console for the machine on which the product installation resides must support Java-based GUIs. All Windows-based consoles support Java-based GUIs; only a subset of UNIX-based consoles support Java-based GUIs.

Note: If you attempt to start the Configuration Wizard in graphical mode on a system that cannot support graphical display, the Configuration Wizard automatically starts in console mode.

You can start the Configuration Wizard in graphical mode from either the Windows **Start** menu or from the command line.

- To start the Configuration Wizard in graphical mode on a Windows platform, choose **Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard**.
- To start the Configuration Wizard in graphical mode from a Windows command prompt or on a UNIX platform:
 - a. Log in to the system on which the product installation resides.

- b. Open an MS-DOS command prompt window (on Windows) or a command shell (on UNIX).
 - c. Go to the `\common\bin` subdirectory of the product installation directory.
 - d. Execute the following command:
On Windows: `config.cmd`
On UNIX: `sh config.sh`
- The Welcome window is displayed.

Starting in Console Mode

When run in console mode, the Configuration Wizard is executed in a text-based environment.

To start the Configuration Wizard in console mode:

1. Log in to the system on which the product installation resides.
2. Open an MS-DOS command prompt window (on Windows) or a command shell (on UNIX).
3. Go to the `\common\bin` subdirectory of the product installation directory.
4. Execute the following command:
 - Windows: `config.cmd -mode=console`
 - UNIX: `sh config.sh -mode=console`

Note: The command and arguments must be entered in lower case.

The Welcome screen is displayed.

To proceed, respond to the prompts by entering the number associated with your choice, pressing Enter. The arrow (->) adjacent to a choice indicates the current selection.

- To accept the current selection, type `next` (or `n`) and press Enter.
- To close the Configuration Wizard, enter `Exit` (or `x`) and press Enter.
- To review or change earlier selections, enter `Previous` (or `p`) and press Enter.

Creating a WebLogic Domain

Before you can develop and run WebLogic-based applications, you must first create a domain. The Configuration Wizard guides you through the process of creating a new domain quickly and easily, by selecting the product components that you want to include in your domain, or by using domain templates.

1. Start the Configuration Wizard as described in [Starting the Configuration Wizard](#).

The **Welcome** window is displayed.

2. Select **Create a new WebLogic domain** and click **Next**.

3. Select one of the following options:

- **Generate a domain configured automatically to support the following products:**

WebLogic Server is selected, by default.

Select the check boxes corresponding to the other products that you want to include in the domain.

- **Base this domain on an existing template**

Select this option if you want to create a domain by using an existing domain template. For information about domain templates, see [Domain Template Reference](#).

Enter the full path to the template in the **Template location** field, or click **Browse** to navigate to the directory containing the required template.

Note: While using the Configuration Wizard or the WebLogic Scripting Tool to create or extend a clustered domain with a template that has applications containing

application-scoped JDBC and/or JMS resources, you may need to perform additional steps (after the domain is created or extended) to make sure that the application and its application-scoped resources are targeted and deployed properly in a clustered environment. For more information on targeting and deploying application-scoped modules, see [Deploying Applications and Modules with weblogic.deployer](#).

Click **Next**.

The **Configure Administrator Username and Password** window is displayed.

4. Configure the username and password for the administrator.
 - The username is used to boot the administration server and connect to it. Do not use commas or any of the following characters: \t, <, >, #, |, &, ?, (), { }.
 - The username is case sensitive.
 - The password value is encrypted. The password must contain at least eight characters, and is case sensitive.

Note: Do not use the `weblogic` as the password in a production environment.

Click **Next**.

The **Configure Server Start Mode and JDK** window is displayed.

5. Select the WebLogic domain startup mode.
 - In the development mode, the configuration of security is relatively relaxed, allowing you to auto-deploy applications.
 - In the production mode, the configuration of security is stringent, requiring a user name and password to deploy applications. Before putting a domain into production, familiarize yourself with the securing the production environment. For more information, see [Securing a Production Environment](#).

For information about changing the run-time mode after you have created a domain, see [“Change to production mode”](#) in the *WebLogic Server Administration Console Online Help*.

[Table 3-1](#) provides information to help you choose a startup mode that suits your requirements.

Table 3-1 Differences Between Development Mode and Production Mode

Function	In development mode...	In production mode...
SSL	<p>You can use the demonstration digital certificates and the demonstration keystores provided by the WebLogic Server security services. With these certificates, you can design your application to work within environments secured by SSL.</p> <p>For more information about managing security, see Configuring SSL.</p>	<p>You must not use the demonstration digital certificates and the demonstration keystores. If you do so, a warning message is displayed.</p>
Deploying applications	<p>WebLogic Server instances can deploy and update applications that reside in the <code>domain_name/autodeploy</code> directory automatically.</p> <p>It is recommended that this method be used only in a single-server development environment.</p> <p>For more information, see Deploying Applications to WebLogic Server.</p>	<p>The auto-deployment feature is disabled; so, you must use the WebLogic Server administration console, the <code>weblogic.Deployer</code> tool, or the WebLogic Scripting Tool.</p>
Log file rotation	<p>By default, when you start the WebLogic Server instance, the server automatically renames (rotates) its local server log file as <code>SERVER-NAME.log.n</code>. For the remainder of the server session, messages accumulate in the log file until the file grows to a size of 500 kilobytes.</p> <p>For more information, see Rotate Log Files.</p>	<p>The server rotates the local log file after the size of the file reaches 5000 kilobytes.</p> <p>When the server is configured for production mode, by default, all versions of the log files are kept. Administrators may want to customize the number of log files retained.</p>
JDBC system resource	<p>The default capacity is 15 connections.</p>	<p>The default capacity is 25 connections.</p>

6. Select the JDK

In the **JDK Selection** pane, select the JDK for the startup mode that you selected in the **WebLogic Domain Startup Mode** pane.

The Configuration Wizard presents a list of the JDKs included in the installer. You can choose one of these JDKs or another JDK that you have installed on your system.

Note: If you select a JDK that is included in the installer, the Configuration Wizard creates server startup scripts to invoke the JDK. If you select a JDK that is not supplied by JDK, the Configuration Wizard does not configure the startup scripts; you must change the startup scripts manually. For more information about startup scripts, see [WLS Performance and Tuning](#).

Select only those JDKs that are supported on the platform you are using. For a list of the JDKs that are supported for a specific platform, see [Supported Configurations](#). The default selection reflects the JDK that best meets the requirements of your environment, based on the platform on which you are installing the domain.

Note: If you plan to use the JRockit JDK in production mode, it is recommended that you develop and test your applications by using JRockit early in the project cycle. For more information, see the [JRockit documentation](#).

Click **Next**.

The **Customize Environment and Services Settings** window is displayed.

7. While creating the domain, you can specify the RDBMS security store settings, configure the distribution of your domain across servers, clusters, and machines, specify JDBC data sources, define JMS file store settings.

- To configure the distribution of your domain across servers, clusters, and machines, or to modify existing JDBC and JMS file store settings, select **Yes** and click **Next**.

The **Configure RDBMS Security Store Database** window is displayed.

For information about configuring the RDBMS security store, managed servers, clusters, and machines see [Customizing the Environment](#).

For information about specifying JDBC data sources and defining JMS file store settings, see [Customizing JDBC and JMS Settings in WebLogic Domains](#).

- To retain the current settings, select **No** and click **Next**.

The **Create WebLogic Domain** window is displayed.

8. Enter the name of the domain and specify the domain location.
 - Domain names must not start with a number. This restriction prevents potential conflicts with internally-generated JDBC store table names, which must begin with a letter.
 - The domain directory can be located anywhere in the system. By default, it resides in `BEA_HOME\user_projects\domains\domain`, where `BEA_HOME` is the directory that

contains the product installation, and *domain* is the name of the domain directory defined by the selected template.

The Configuration Wizard stores the `config.xml` file and all other generated components in the domain directory that you specify.

9. Click **Create**.

Note: You cannot overwrite an existing domain. If a domain with the name you specified already exists in the selected location, you must either delete the existing domain, or specify a different name or location for the new domain.

The **Creating Domain** window displays status messages during the domain creation process.

When the process is complete, the new domain is ready for use.

- If you want to start the server immediately, select the **Start Admin Server** check box and click **Done**. This option is available only for Windows systems.
- If you do not want to start the server at this time, click **Done**.

Creating an Oracle Service Bus Domain

Before you can develop and run Oracle Service Bus-based applications, you must first create an Oracle Service Bus domain on an Oracle WebLogic Server. The Configuration Wizard guides you through the process of creating a new domain quickly and easily, by selecting the product components you want to include in your domain, or by using domain templates.

The following topics describe the steps required to create a new Oracle Service Bus domain using the Configuration Wizard:

- [Create or Extend a Domain](#)
- [Select a Domain Source](#)
- [Configure an Administrator Username and Password](#)
- [Specify the Server Start Mode and JDK](#)
- [Customize Environment and Services Settings](#)
- [Create the WebLogic Domain](#)
- [Creating Domain](#)

Related Topics

[“Creating a Domain” on page 1-6](#)

[“Introduction to Domains” on page 1-1](#)

[“Creating a Domain” on page 11-1](#)

Create or Extend a Domain

The **Welcome** window prompts you to choose whether you want to create a new domain or extend an existing one.

Table 4-1 Welcome window

Choose this option...	When you want to...
Create a new WebLogic domain	Create a new domain that is configured to meet your requirements. Begin by selecting the product components you want to include in your domain, or a domain template to be used as the basis for your domain. Then modify settings as required.
Extend an existing WebLogic domain	Add product component functionality or support for additional applications and services to an existing domain. Begin by selecting the directory of the domain that you want to update. Then specify the product components you want to add, or identify the extension template you want to use for adding applications and services. You then have the option of customizing the JDBC connections to your database and the JMS file store, if defined. To learn more, see Chapter 9, “Extending WebLogic Domains.”

Related Topics

[“Creating a Domain” on page 1-6](#)

[“Introduction to Domains” on page 1-1](#)

[“Creating a Domain” on page 11-1](#)

Select a Domain Source

The **Select a Domain Source** window prompts you to select the source from which to create the domain. You can select the product components to include in your domain, or select a custom [template](#) on which to base your domain.


Choose one of the following options for selecting the source for your domain:

- **Generate a domain configured automatically to support the following products:**

To use this option, select the check boxes associated with the components you want to include, and click **Next**.

You can select the following product components in the **Select a Domain Source** window as displayed in [Figure 4-1](#). For more information about selecting different products from the list of products and relation between them, see http://download.oracle.com/docs/cd/E12840_01/common/docs103/tempref/tempref.html.

Figure 4-1 Select Domain Source window

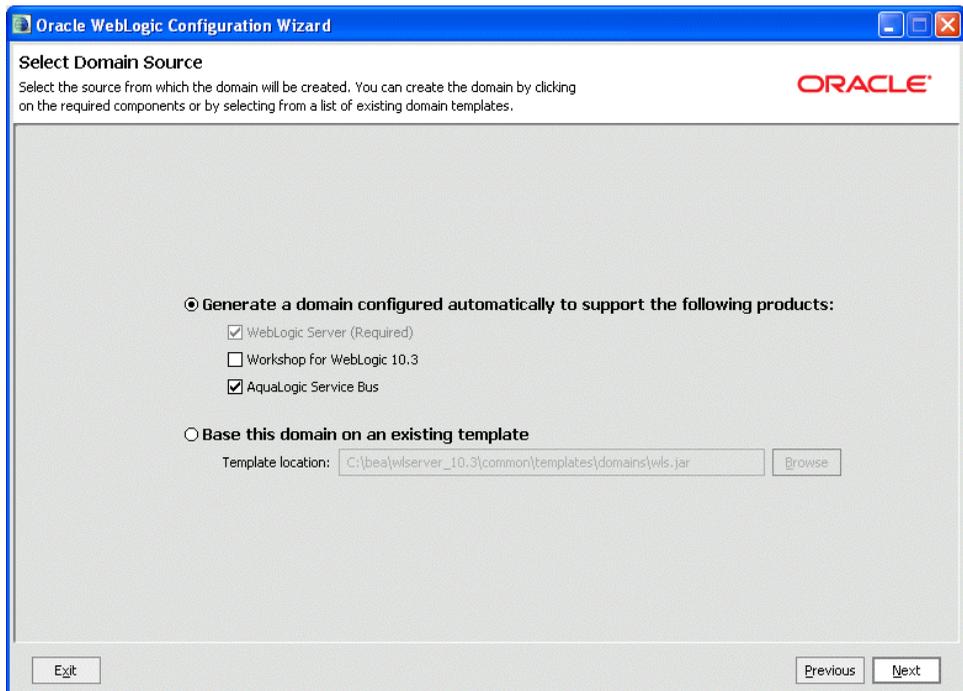

The WebLogic Server is selected by default.

- **Base this domain on an existing template**

To use this option, manually enter the full pathname to the template in the **Template location** field and click **Next**, or click **Browse** to navigate to the directory containing the desired template. Select the domain template that contains the settings you want to use as the basis for your domain.

Note: While using the Configuration Wizard or Oracle WebLogic Scripting Tool Off-line to create or extend a clustered domain with a template that has applications containing application-scoped JDBC and/or JMS resources, you may need to perform additional

steps (after the domain is created or extended) to make sure that the application and its application-scoped resources are targeted and deployed properly in a clustered environment. For more information on the targeting and deployment of application-scoped modules, see “Deploying Applications and Modules with `weblogic.deployer`” in *Deploying Applications to WebLogic Server* at the following URL:

http://download.oracle.com/docs/cd/E12840_01/wls/docs103/deployment/deploy.html.

Configure an Administrator Username and Password

The **Configure Administrator Username and Password** window prompts you to specify a username and password to be used for starting the Administration Server.

To configure an administrator username and password:

1. Enter a valid value in the **Username** field. This name is used to boot the Administration Server and connect to it.

Do not use commas or any characters in the following comma-separated list: `\t`, `<`, `>`, `#`, `|`, `&`, `?`, `(`, `)`, `{`, `}`. User names are case sensitive.

2. Enter a valid value in the **User password** field: a string of at least 8 case-sensitive characters. The password value is encrypted.

Note: Do not use `password = weblogic` in a production environment.

3. Reenter the password in the **Confirm user password** field.
4. Optionally, enter a login description for this username.
5. Click **Next** to proceed to the next configuration window.

Specify the Server Start Mode and JDK

The **Configure Server Start Mode and JDK** window prompts you to specify the:

- [Startup mode for your domain](#)
- [JDK to be used for the domain](#)

Choose the Startup Mode

Specify the startup mode for your domain as shown in the following table.

Table 4-2 Choose the Startup mode

Choose this mode...	When...
Development	You are creating your applications. In this mode, the configuration of security is relatively relaxed, allowing you to auto-deploy applications.
Production	Your application is running in its final form. In this mode, security is fully configured. Note: Before putting a domain into production, Oracle recommends that you familiarize yourself with the content of <i>Securing a Production Environment</i> at http://e-docs.bea.com/wls/docs103/lockdown/index.html .

Differences Between Domain Startup Modes

The following table describes the differences between development and production modes in terms of key functions.

Table 4-3 Differences Between Development and Production Modes

Function	In development mode...	In production mode...
SSL	<p>You can use the demonstration digital certificates and the demonstration keystores provided by the WebLogic Server security services. With these certificates, you can design your application to work within environments secured by SSL.</p> <p>For more information about managing security, see "Configuring SSL" in <i>Securing WebLogic Server</i> at the following URL: http://download.oracle.com/docs/cd/E12840_01/wls/docs103/ecmanage/ssl.html</p>	<p>You should not use the demonstration digital certificates and the demonstration keystores. If you do so, a warning message is displayed.</p>
Deploying Applications	<p>WebLogic Server instances can automatically deploy and update applications that reside in the domain_name/autodeploy directory (where domain_name is the name of a domain).</p> <p>It is recommended that this method be used only in a single-server development environment.</p> <p>For more information, see <i>Deploying Applications to WebLogic Server</i> at the following URL: http://download.oracle.com/docs/cd/E12840_01/wls/docs103/deployment/deploy.html</p>	<p>The auto-deployment feature is disabled, so you must use the WebLogic Server Administration Console, the weblogic.Deployer tool, or the WebLogic Scripting Tool (WLST). For more information, see <i>Deploying Applications to WebLogic Server</i> at the following URL: http://download.oracle.com/docs/cd/E12840_01/wls/docs103/deployment/index.html</p>

Table 4-3 Differences Between Development and Production Modes

Function	In development mode...	In production mode...
Log File Rotation	When you start a server, the server automatically renames (rotates) its local server log file as server-name .log.n. For the remainder of the server session, the server rotates its local log file whenever the size of the file reaches 500 kilobytes.	A server rotates its local log file after the size of the file reaches 5000 kilobytes. When the server is configured for production mode, by default, all versions of the log files are retained. Administrators may want to customize the number of log files retained.
JDBC System Resource	The default capacity is 15 connections.	The default capacity is 25 connections.

Select the JDK for the Domain

The **JDK Selection** pane prompts you to select the J2SE Development Kit (JDK) for the startup mode you selected in the **WebLogic Domain Startup Mode** pane. The Configuration Wizard presents a list of the JDKs supplied by Oracle and installed with the product, including:

- Sun JDK (from Sun Microsystems)
- Oracle JRockit JDK

You can choose one of the JDKs supplied by Oracle or another JDK that you have installed on your system. If you select a JDK supplied by Oracle, the Configuration Wizard will create server startup scripts that invoke the JDK you select.

For more information about startup scripts, see *WLS Performance and Tuning* available at:

http://download.oracle.com/docs/cd/E12840_01/wls/docs103/perform/WLSTuning.html

Select only those JDKs that are supported on the platform you are using. For a list of the JDKs that are supported for a specific platform, see *Supported Configurations* available at the location:

http://download.oracle.com/docs/cd/E12840_01/platform/suppconfigs/index.html

The default selection reflects the JDK that best meets the requirements of your environment, based on the platform on which you are installing the domain.

Note: If you plan to use the JRockit JDK in production mode, Oracle recommends that you develop and test your applications using Oracle JRockit early in your project cycle. For information about Oracle JRockit, see the *Oracle JRockit JDK* documentation at the following URL:

<http://www.oracle.com/technology/software/products/jrockit/index.html>

To select the JDK:

1. Perform one of the following steps:

- To use a JDK supplied by Oracle, select **Available JDKs** and then select a JDK from the list.
- To use a JDK that is not installed with the product, select **Other JDK**, click **Browse**, and navigate to the appropriate directory.

Note: The Configuration Wizard does not configure the start scripts to use this type of JDK. You must change the start scripts manually.

2. Click **Next** to proceed to the next configuration window.

Related Topics

For information on changing the run-time mode after you have created a domain, see “Change to production mode” in the *WebLogic Server Administration Console Online Help* at http://download.oracle.com/docs/cd/E13222_01/wls/docs100/ConsoleHelp/taskhelp/domainconfig/ChangeRuntimeModes.html.

Customize Environment and Services Settings

The **Customize Environment and Services Settings** window gives you the option to change the distribution of your domain across servers, clusters, and machines, and to modify existing JDBC and JMS file store settings.

If you choose not to customize any environment or services settings by accepting the default (**No**), you proceed directly to creating the domain.

The following topics summarize the settings you can change.

Customize the Environment

You can customize the environment of your domain as follows:

- Change the configuration of the RDBMS security store database
- Change the configuration of the Administration Server, including listen address and listen ports
- Add or delete Managed Servers, or change the configuration of existing Managed Servers defined in the selected template
- Group the Managed Servers into clusters, which allows multiple Managed Servers to operate as a single unit to host applications and resources. To group the Managed Servers into clusters, you have the option of performing the following steps:
 - Add or delete clusters, or change the configuration of existing clusters
 - Assign the Managed Servers to a cluster in the domain
 - Create an HTTP proxy for each cluster within the domain
- Assign WebLogic Server instances to host machines. In a domain, machine definitions identify a particular, physical piece of hardware and are used to associate a computer with the Managed Servers it hosts. To map WebLogic Server instances to host machines, you have the option of performing the following steps:
 - Add or delete machines, or change the configuration of existing machines
 - Assign each instance of WebLogic Server to the machine on which it runs.

For more information, see [Chapter 5, “Customizing the Environment”](#) and [Chapter 6, “Customizing the Oracle Service Bus Environment.”](#)

Customize Existing JDBC and JMS Settings

If the domain source on which you are basing your domain contains a database configuration, you have the option to do the following:

- Modify JDBC Data Source settings, including database type and drivers
- Test the connections to the database
- Load the database

If a JMS file store has been defined in the domain source, you can also change the file store definition.

For more information, see [Chapter 7, “Customizing JDBC and JMS Settings in WebLogic Domains”](#) and [Chapter 8, “Customizing JDBC and JMS Settings in Oracle Service Bus Domains.”](#)

Create the WebLogic Domain

The **Create WebLogic Domain** window prompts you to specify the name and pathname for the domain, and initiate its creation.

To create the WebLogic domain:

1. Make sure that the **Domain Name** field contains the name of the required domain. If you need to change the value in this field, click within the field and modify the string displayed there.
2. Make sure that the **Domain Location** field contains the name of the required domain directory. If you need to change the value in this field:
 - a. Click **Browse** to invoke the **Select a WebLogic Domain Directory** dialog box.
 - b. In the dialog box, navigate to the appropriate directory or manually enter its pathname in the **Location** field. Click **OK**.

The domain directory can be located anywhere on your system. By default, it resides in *BEA_HOME\user_projects\domains\domain*, where *BEA_HOME* is the directory that contains the product installation, and *domain* is the name of the domain directory defined by the selected domain template.

3. Click **Create**.

Note: You cannot overwrite an existing domain. If a domain with the name you specify already exists in the selected location, you must either delete the existing domain, or specify a different name or location for this domain.

The **Creating Domain** window is opened to display status messages during the domain creation process.

The Configuration Wizard stores the `config.xml` file and all other generated components in the domain directory that you specify.

Creating Domain

The **Creating Domain** window displays status messages during the domain creation process. When the process is complete, the new domain is ready for use.

Table 4-4 Creating Domain

On this platform . . .	Perform the following task . . .
UNIX and Linux	Click Done.
Windows	Do one of the following: <ul style="list-style-type: none"><li data-bbox="462 631 1143 683">• If you want to start the server immediately, select the Start Admin Server check box and click Done.<li data-bbox="462 701 1085 722">• If you do not want to start the server at this time, click Done.

Customizing the Environment

While creating a domain, you can (optionally) specify the RDBMS security store settings, configure the distribution of your domain across servers, clusters, and machines, specify JDBC data sources, define JMS file store settings.

This section describes how you can configure the domain environment while creating a domain.

To configure the domain environment, you must select **Yes** in the **Customize Environment and Services Settings** window. The Configuration Wizard guides you through the following series of steps.

- [Configuring the RDBMS Security Store Database](#)
- [Configuring the Administration Server](#)
- [Configuring Managed Servers](#)
- [Configuring Clusters](#)
- [Assigning Managed Servers to Clusters](#)
- [Creating HTTP Proxy Applications](#)
- [Configuring Machines](#)
- [Assigning Servers to Machines](#)

Configuring the RDBMS Security Store Database

You can define RDBMS security store settings in the **Configure RDBMS Security Store Database** window, which is displayed when you select **Yes** in the **Customize Environment and Services Settings** window of the Configuration Wizard.

If RDBMS security store data already exists in `config.xml`, the data is displayed in read-only mode in the **Configure RDBMS Security Store Database** window.

- To retain the current settings, select **I don't want to change anything here**, and click **Next**.

Note: You can test the connection to the database by clicking **Test Connection**.

- To create or change the RDBMS security store settings, select **I want to create, change, or remove RDBMS support**. You can now enter values in the fields of the window.

[Table 5-1](#) describes the fields in the **Configure RDBMS Security Store Database** window.

Note: Fields marked with an asterisk are mandatory fields.

Table 5-1 Configure RDBMS Security Store Database

Field	Description
* Database Type	From the drop-down list, select the type of database that you want to use as the RDBMS security store. By default, the NONE option is selected. For information about supported databases, see Supported Configurations .
* Driver	Select the driver that you want to use for the database. The list of available drivers varies, depending on the database type that you select.
* Class Name	No action is required. The class name is displayed automatically based on the driver that you select.
* DBMS Name	Enter the name of the database.
* DBMS Host	Enter the name of the machine that hosts the database.
* DBMS Port	Enter the port to be used to connect to the server. The default port number that is associated with the selected database type is displayed automatically.

Table 5-1 Configure RDBMS Security Store Database

Field	Description
*URL	No action is required. The URL is displayed automatically based on the driver that you select.
*User Name	Enter the login name for connecting to the database.
*User Password	Enter the password for accessing the database. Valid values consist of a string of alphanumeric characters. The hyphen (-) and underscore (_) characters are supported. The value is encrypted.
*Confirm User Password	Re-enter the password.
*Known Properties	No action is required. The known properties of the database are displayed automatically based on the driver that you select.
Additional Properties	Enter additional properties, if any, to be passed to the driver.

After specifying the RDBMS security store settings, click **Next**.

Notes: You can test the connection to the database by clicking **Test Connection**.

Before starting the server, you must load the necessary SQL scripts for the RDBMS security store.

If you use an RDBMS security store in a clustered domain, it is recommended that you use it with JMS configuration (JNDI name and JMS topic). For more information, see the [WebLogic Server Administration Console Online Help](#).

Configuring the Administration Server

In every domain, one server must be designated as the administration server: the central point from which the whole domain is managed.

You can access the administrator server by using the URL `protocol://listen-address:listen-port`. The `protocol` can be any of the following: `t3`, `t3s`, `http`, `https`.

You can define the *listen-address* and *listen-port* in the **Configure the Administration Server** window of the Configuration Wizard.

Note: The **Configure the Administration Server** window is displayed when you select **Next** in the **Configure RDBMS Security Store Database** window of the Configuration Wizard.

[Table 5-2](#) describes the fields in the **Configure the Administration Server** window. Specify the appropriate values, and then click **Next** to proceed.

Note: Fields marked with an asterisk are required.

Table 5-2 Configuring the Administration Server

In this field...	Do the following...
Name*	<p>Enter a valid server name: a string of characters that can include spaces.</p> <p>Each server instance in the product environment must have a unique name, regardless of the domain or cluster in which it resides, and regardless of whether it is an administration server or a managed server. In addition, the name of the administration server must be unique among all component names within the domain.</p> <p>Note: This value is specified for identification purposes only; it is not used as part of the URL for applications that are deployed on the server. The server name is displayed in the WebLogic Server administration console. In addition, if you use WebLogic Server command-line utilities or APIs, you must specify this name to identify the server.</p>
Listen address	<p>From the drop-down list, select a value for the listen address.</p> <p>If you select localhost as the listen address for a server instance, non-local processes cannot connect to that server instance. Only processes on the machine that hosts the server instance can connect to the server instance. If the server instance must be accessible as localhost (for example, if you create administrative scripts that connect to localhost), and it must also be accessible by remote processes, select All Local Addresses. The server instance determines the address of the machine and listens on it.</p> <p>For more information, see Specifying the Listen Address.</p>
Listen port	<p>Enter a valid value for the listen port to be used for regular, non-secure requests (via protocols such as HTTP and T3). The default value is 7001. If you leave this field blank, the default value is used. The valid listen port range is from 1 to 65534.</p> <p>For more information, see Specifying the Listen Port.</p>

Table 5-2 Configuring the Administration Server

In this field...	Do the following...
SSL enabled	Select this check box to enable the SSL listen port. By default, SSL is disabled for all new servers.
SSL listen port	<p>This field is enabled only if the SSL enabled check box is selected.</p> <p>Enter a valid value to be used for secure requests (via protocols such as HTTPS and T3S). The default value is 7002. If you leave this field blank, the default value is used.</p> <p>The valid listen port range is from 1 to 65535.</p> <p>Note: By default, a server instance uses demonstration certificates to authenticate requests from a secure port. In a production environment, you must configure SSL to use certificates from a certificate authority. For more information, see Configuring SSL.</p> <p>For more information, see Specifying the Listen Port.</p>

Specifying the Listen Address

Table 5-3 provides guidelines for specifying the listen address for a server.

Table 5-3 Specifying Listen Address

If the listen address is set to...	Then...
All Local Addresses or a DNS name	On multi-homed Windows machines, a server instance binds to all available IP addresses.
An IP address or a DNS name	<ul style="list-style-type: none">• To connect to the server instance, processes can specify either the IP address or the corresponding DNS name.• Processes that specify localhost fail to connect.• You must update existing processes that use localhost to connect to the server instance.• For connections that specify the IP address for the listen address and a secured port for the listen port, host name verification must be disabled. <p>Note: To resolve a DNS name to an IP address, WebLogic Server must be able to contact an appropriate DNS server or obtain the IP address mapping locally. Therefore, if you specify a DNS name for the listen address, you must either leave a port open long enough for the WebLogic Server instance to connect to a DNS server and cache its mapping or you must specify the IP address mapping in a local file. If you specify an IP address for the listen address and then a client request specifies a DNS name, WebLogic Server attempts to resolve the DNS name, but if it cannot access DNS name mapping, the request fails.</p>
localhost	<ul style="list-style-type: none">• Processes must specify localhost to connect to the server instance.• Only processes that reside on the machine that hosts the server instance (local processes) will be able to connect to the server instance.

Specifying the Listen Port

Note the following guidelines when specifying the listen ports and secure listen port:

- Although you can specify any valid port number, if you specify port 80, you can omit the port number from the HTTP request used to access resources over HTTP. For example, if you define port 80 as the listen port, you can use the URL:

`http://hostname/myfile.html` instead of
`http://hostname:portnumber/myfile.html`.

- On some operating systems, port 80 can be accessed only by processes run under a privileged user or group ID. In this case, you can assign the server instance to a UNIX machine on which a Post-Bind UID or GID is defined.
- In a development environment, you might want to run multiple instances of WebLogic Server on a single computer. If you do so, each instance must use a unique listen port-listen address combination.

On a multi-homed computer, you can use the same listen port but you must configure each server to use a unique IP address as the listen address. If your computer does not support multiple IP addresses, you must use a different listen port for each active instance.

Configuring Managed Servers

In production environments, enterprise applications are hosted, typically, on one or more managed servers, in addition to the administration server.

You can add and delete managed servers in the **Configure Managed Servers** window, which is displayed when you click **Next** in the **Configure the Administration Server** window of the Configuration Wizard.

Note: You can create managed servers on remote machines by using the `pack` and `unpack` commands. For more information, see [Creating and Starting a Managed Server on a Remote Machine](#).

1. Review the current managed server configurations. Default values may vary, based on the domain source you selected earlier.

Note: The wizard provides two views: a concise tabular view of all the managed servers and an individual view of each managed server, where each server is represented by a tab—you switch between servers by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.

2. Add or delete managed servers, or change the settings for existing managed servers, as required for your domain.
3. After configuring the managed servers, click **Next** to proceed.

Configuring Clusters

A cluster is a group of WebLogic Server instances that work together to provide scalability and high-availability for applications. By creating clusters, you can group managed servers such that they operate as a single unit for hosting applications and resources.

You can add, configure, and delete clusters in the **Configure Clusters** window of the Configuration Wizard. This window is displayed when you click **Next** in the **Configure Managed Servers** window, only if the domain contains at least one managed server.

1. Review the current cluster configuration. Default values may vary, based on the domain source you selected earlier.

Note: The wizard provides two views: a concise tabular view of all the clusters and an individual view of each cluster, where each cluster is represented by a tab—you switch between clusters by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.

2. Add or delete clusters, or change the settings for existing clusters, as required for your domain.

Note: Fields marked with an asterisk are required.

Table 5-4 Configuring Clusters

Field	Action
Name*	Enter a valid name for the cluster: a string of characters that can include spaces. The name of the cluster must be unique among all component names within the domain. The default value in this field is new_Cluster_n , where n is a numeric value that is used to differentiate among all the default cluster names; the value of n for the first cluster is 1. The value is incremented by 1 for each cluster that you add.
Multicast address	Enter the multicast address for the cluster. This address is used by cluster members to communicate with each other. The default value is 239.192.0.0. The valid multicast address range is 224.0.0.1 to 239.255.255.255.

Table 5-4 Configuring Clusters

Field	Action
Multicast port	<p>Enter the multicast port for the cluster.</p> <p>The multicast port is used by cluster members to communicate with each other. The default value is 7001.</p> <p>Valid values for multicast ports are from 1 to 65534.</p>
Cluster address	<p>Enter the addresses to identify the managed servers in the cluster.</p> <p>A cluster address can be one of the following:</p> <ul style="list-style-type: none">• Comma-separated list of IP addresses or DNS names and ports (for example: <code>dns_name:port, dns_name:port</code>)• DNS name that maps to multiple IP addresses• <code>localhost</code>, DNS name, or IP address if the listen address of all managed servers is listening to the same address with unique port numbers <p>The cluster address is used in entity and stateless EJBs to construct the host name portion of URLs. If the cluster address is not set, EJB handles may not work properly.</p>

3. After configuring the clusters, click **Next** to proceed.

Related Topics

[Setting Up WebLogic Clusters](#) in *Using WebLogic Server Clusters*

Assigning Managed Servers to Clusters

You can assign the available managed servers to clusters within the domain in the **Assign Servers to Clusters** window.

This window is displayed when you click **Next** in the **Configure Clusters** window, only if you have defined at least one cluster.

1. In the **Cluster** pane, select the cluster to which you want to assign a managed server.
2. Assign the managed server to the designated cluster in one of the following ways:
 - Double-click the name of the managed server in the **Server** pane.
 - Select the managed server and click the right arrow.
 - Shift+click to select multiple managed servers; then, click the right arrow.

The name of the managed server is removed from the **Server** pane and added below the name of the target cluster in the **Cluster** pane.

Note: Only managed servers are listed in the **Server** pane. The administration server is not listed because it cannot be assigned to a cluster.

3. Repeat steps 1 and 2 for each managed server that you want to assign to a cluster.
4. Review the cluster assignments.

If necessary, you can remove a managed server from a cluster in one of the following ways:

- Double-click the name of the managed server in the **Cluster** pane.
- Select the managed server and click the left arrow.

The name of the managed server is removed from the **Cluster** pane and restored to the **Server** pane.

5. Click **Next** to proceed.

Creating HTTP Proxy Applications

An HTTP proxy application acts as an intermediary for HTTP requests.

In the **Create HTTP Proxy Applications** window of the Configuration Wizard, you can create an HTTP proxy application for each cluster, and specify the managed server on which the proxy application must be deployed.

This window is displayed when you click **Next** in the **Assign Servers to Clusters** window, only if both of the following statements are true:

- At least one managed server is assigned to a cluster.
- At least one managed server is not assigned to any cluster.

To create HTTP proxy applications:

1. If multiple clusters are defined, select the tab corresponding to the cluster for which you want to create HTTP proxy applications.
2. Select the **Create HTTP proxy for cluster <cluster_name>** check box.

A list of the managed servers that are not assigned to any cluster is displayed in the **Proxy Server** drop-down list.

3. From the **Proxy Server** list, select a managed server on which the proxy applications must be deployed.

A proxy application named `BEAProxy4_clustername_servername` is created and targeted at the managed server.

4. Repeat steps 1 through 3 for each cluster for which you want to create HTTP proxy applications.
5. Click **Next** to proceed.

Configuring Machines

In a domain, the machine definitions identify physical units of hardware and are used to associate computers with the managed servers that they host.

You might want to create machine definitions in situations such as (but not limited to) the following:

- The administration server uses the machine definition, in conjunction with the node manager application, to start remote servers.
- WebLogic Server uses configured machine names when determining the server in a cluster that is best able to handle certain tasks, such as HTTP session replication. WebLogic Server then delegates those tasks to the identified server.

Note: You must configure machines for each product installation that runs a node manager process. The machine configuration must include values for the listen address and port number parameters.

You can create machine definitions in the **Configure Machines** window, which is displayed when you click **Next** in the **Create HTTP Proxy Applications** window of the Configuration Wizard.

1. Select the **Machine** tab (for Windows) and **Unix Machine** tab for (UNIX)
2. Review the current list of configurations, and add or change entries as required for your domain.
 - To add a machine, click **Add**.
 - To delete a machine, select the machine in the list and click **Delete**.

[Table 5-5](#) describes the configuration settings that you can define. Default values may vary based on the domain source that you selected earlier.

Note: Fields marked with an asterisk are required.

Table 5-5 Configure Windows Machine

Field	Description
Name*	<p>Enter a valid machine name: a string of characters that can include spaces.</p> <p>The machine name is used to identify the machine within the WebLogic Server domain; it is not required to match the network name for the machine.</p> <p>The name must be unique among all component names within the domain.</p> <p>The default value in this field is new_Machine_n, where n is a numeric value that is used to differentiate among all default machine names; the value of n for the first machine is 1. The value is incremented by 1 for each machine that you add.</p>
Node manager listen address	<p>Select a value from the drop-down list for the listen address used by node manager to listen for connection requests. By default, the IP addresses defined for the local system and localhost are shown in the drop-down list. The default value is localhost.</p> <p>If you specify an IP address for a machine that hosts the administration server and you need to access the WebLogic Server node manager, you must disable host name verification. For more information, see Using Host Name Verification in Securing WebLogic Server.</p>
Node manager listen port	<p>Enter a valid value for the listen port used by node manager to listen for connection requests.</p> <p>The valid node manager listen port range is from 1 to 65534.</p> <p>The default value is 5556.</p>
Post bind GID enabled	<p>This field is displayed only in the Unix Machine tab.</p> <p>Select this check box to enable a server running on this machine to bind to a UNIX group ID (GID) after it finishes all privileged startup actions (see Post bind GID). By default, this check box is not selected.</p>
Post bind GID	<p>This field is displayed only in the Unix Machine tab.</p> <p>Enter a valid UNIX group ID (GID) that a server running on this machine will run under after it finishes all privileged startup actions. Otherwise, the server continues to run under the group from which it was started. (Requires that you enable post-bind GID.)</p>

Table 5-5 Configure Windows Machine

Field	Description
Post bind UID enabled	This field is displayed only in the Unix Machine tab. Select this check box to enable a server running on this machine to bind to a UNIX user ID (UID) after it finishes all privileged startup actions (see Post bind UID). By default, this check box is not selected.
Post bind UID	This field is displayed only in the Unix Machine tab. Enter a valid UNIX user ID (UID) that a server running on this machine will run under after it finishes all privileged startup actions. Otherwise, the server continues to run under the account from which it was started. (Requires that you enable post-Bind UID.)

3. After updating the settings, click **Next**.

Assigning Servers to Machines

After configuring servers and defining machines, you can assign WebLogic Server instances to machines in the **Assign Servers to Machines** window.

This window is displayed only if you have defined at least one machine. It is displayed when you click **Next** in the **Configure Machines** window.

1. In the **Machine** pane, select the Windows or UNIX machine to which you want to assign a WebLogic Server instance.
2. Assign the appropriate WebLogic Server instance to the designated machine in one of the following ways:
 - Double-click the WebLogic Server instance in the **Server** pane.
 - Select the appropriate WebLogic Server instance in the **Server** pane and click the right arrow.
 - Shift+click to select multiple servers in the **Server** pane; then, click the right arrow.

The name of the WebLogic Server instance is removed from the **Server** pane and added, below the name of the target machine, in the **Machine** pane.

3. Repeat steps 1 and 2 for each WebLogic Server instance that you want to assign to a machine.

4. Review the machine assignments.

If necessary, you can remove a WebLogic Server instance from a machine in one of the following ways:

- Double-click the name of the appropriate WebLogic Server instance in the **Machine** pane.
- Select the appropriate WebLogic Server instance in the **Machine** pane and click the left arrow.

The name of the WebLogic Server instance is removed from the **Machine** pane and restored to the **Server** pane.

5. Click **Next**.

If the domain source on which you are basing your domain contains JDBC data source and JMS file store definitions, you are presented with the option to modify them as described in [Chapter 7, “Customizing JDBC and JMS Settings in WebLogic Domains.”](#) Otherwise, you are presented with the option to review the domain settings and create the domain.

Review the Domain Settings and Create the Domain

The **Review WebLogic Domain** window allows you to review the detailed configuration settings of your domain before the Configuration Wizard creates it.

1. Select an item in the **Domain Summary** pane on the left and review the associated details in the **Details** pane on the right. You can make limited adjustments by clicking **Previous** to return to a previous window.

Note: You can limit the type of information displayed in the **Domain Summary** pane by selecting a filter from the **Summary View** drop-down list.

2. After reviewing the domain settings, click **Next**.

The **Create WebLogic Domain** window is displayed

3. Enter the name of the domain and specify the domain location.

- Domain names must not start with a number. This restriction prevents potential conflicts with internally-generated JDBC store table names, which must begin with a letter.
- The domain directory can be located anywhere in the system. By default, it resides in `BEA_HOME\user_projects\domains\domain`, where `BEA_HOME` is the directory that

contains the product installation, and *domain* is the name of the domain directory defined by the selected template.

The Configuration Wizard stores the `config.xml` file and all other generated components in the domain directory that you specify.

4. Click **Create**.

Note: You cannot overwrite an existing domain. If a domain with the name you specified already exists in the selected location, you must either delete the existing domain, or specify a different name or location for the new domain.

The **Creating Domain** window displays status messages during the domain creation process.

When the process is complete, the new domain is ready for use.

- If you want to start the server immediately, select the **Start Admin Server** check box and click **Done**. This option is available only for Windows systems.
- If you do not want to start the server at this time, click **Done**.

Customizing the Oracle Service Bus Environment

When you are creating a new domain using the Configuration Wizard, you have the option to change the distribution of your domain across servers, clusters, and machines.

The following topics describe the steps required to change the environment for your domain:

- [Configure the Administration Server](#)
- [Configure Managed Servers](#)
- [Configure Clusters](#)
- [Assign Managed Servers to Clusters](#)
- [Create HTTP Proxy Applications](#)
- [Configure Machines](#)
- [Assign Servers to Machines](#)
- [Review the Domain Settings](#)

Related Topics

[“Creating a Domain with Managed Servers and Clusters” on page 11-4](#)

Configure the Administration Server

In every domain, one server must be designated the Administration server: the central point from which the whole domain is managed. The **Configure the Administration Server** window prompts you to define configuration information for the Administration Server. This information is used to access the Administration Server in the domain.

Servers can be reached using the following URL:

protocol://listen-address:listen-port

In this URL, *protocol* can be any of the following:

- t3
- t3s
- http
- https

listen-address and *listen-port* are defined in the **Configure the Administration Server** window.

To configure the Administration Server:

Review the values displayed in the window and modify them as necessary, using the guidelines provided in the following table. When you finish updating your settings, click **Next**.

Notes:

- You must first select **Yes** in the **Customize Environment and Service Settings** to go to the **Configure Administration Server**.
- Fields marked with an asterisk are mandatory.

Table 6-1 Configure the Administration Server Window Fields

In this field...	Do the following...
Name*	<p data-bbox="462 444 1170 626">Enter a valid server name: a string of characters that can include spaces. Each server instance in your product environment must have a unique name, regardless of the domain or cluster in which it resides, or whether it is an Administration Server or a Managed Server. In addition, the name of the Administration Server must be unique among all component names within the domain.</p> <p data-bbox="462 652 1170 821">Note: This value is specified for identification purposes only; it is not used as part of the URL for applications that are deployed on the server. The server name is displayed in the Oracle WebLogic Server Administration Console. In addition, if you use Oracle WebLogic Server command-line utilities or APIs, you must specify this name to identify the server.</p>
Listen address	<p data-bbox="462 852 1170 904">From the drop-down list, select a value for the listen address. Valid values for the listen address are as follows:</p> <ul data-bbox="462 921 1170 1086" style="list-style-type: none"><li data-bbox="462 921 1170 947">• All Local Addresses (default)<li data-bbox="462 956 1170 982">• IP address of the computer that hosts the server<li data-bbox="462 991 1170 1017">• DNS name that resolves to the host<li data-bbox="462 1025 1170 1086">• localhost (valid only for requests that are issued from the computer on which the server is running) <p data-bbox="462 1104 1170 1303">If you identify the listen address for a server instance as localhost, non-local processes cannot connect to the server instance. Only processes on the machine that hosts the server instance can connect to the server instance. If the server instance must be accessible as localhost (for example, if you create administrative scripts that connect to localhost), and it must also be accessible by remote processes, select All Local Addresses. The server instance determines the address of the machine and listens on it.</p> <p data-bbox="462 1321 1170 1373">To learn more about Listen Addresses, see “Specifying Listen Addresses” on page 6-4.</p>
Listen port	<p data-bbox="462 1399 1170 1486">Enter a valid value for the listen port to be used for regular, non-secure requests (via protocols such as HTTP and T3). The default value is 7001. If you leave this field blank, the default value is used.</p> <p data-bbox="462 1503 1170 1529">The valid listen port range is from 1 to 65,534.</p> <p data-bbox="462 1546 1170 1565">For more information, see “Specifying Listen Ports” on page 6-6.</p>

Table 6-1 Configure the Administration Server Window Fields

In this field...	Do the following...
SSL listen port	<p>Enter a valid value to be used for secure requests (via protocols such as HTTPS and T3S). The default value is 7002. If you leave this field blank, the default value is used.</p> <p>The valid listen port range is from 1 to 65,535.</p> <p>Note: By default, a server instance uses demonstration certificates to authenticate requests from a secure port. In a production environment, you must configure SSL to use certificates from a certificate authority. For more information, see "Configuring SSL" in <i>Securing WebLogic Server</i> at http://download.oracle.com/docs/cd/E12840_01/wls/docs103/secmanage/ssl.html.</p> <p>For more information, see “Specifying Listen Ports” on page 6-6.</p>
SSL enabled	<p>Select the check box in this field to enable the SSL listen port. By default, the SSL is disabled for all new servers.</p>

Specifying Listen Addresses

If you want to limit the valid listen address for a server, use the guidelines for specifying listen addresses provided in the following table.

Table 6-2 Listen Address Details

If the listen address is set to...	Then the following is true...
All Local Addresses or DNS name	On multi-homed Windows machines, a server instance binds to all available IP addresses.
IP Address or DNS name	<ul style="list-style-type: none">• To connect to the server instance, processes can specify either the IP address or the corresponding DNS name.• Processes that specify localhost fail to connect.• You must update existing processes that use localhost to connect to the server instance.• For connections that specify the IP address for the listen address and a secured port for the listen port, host name verification must be disabled. <p>Note: Note: To resolve a DNS name to an IP address, Oracle WebLogic Server must be able to contact an appropriate DNS server or obtain the IP address mapping locally. Therefore, if you specify a DNS name for the listen address, you must either leave a port open long enough for the Oracle WebLogic Server instance to connect to a DNS server and cache its mapping or you must specify the IP address mapping in a local file. If you specify an IP address for the listen address and then a client request specifies a DNS name, Oracle WebLogic Server will attempt to resolve the DNS name, but if it cannot access DNS name mapping, the request will fail.</p>
localhost	<ul style="list-style-type: none">• Processes must specify localhost to connect to the server instance.• Only processes that reside on the machine that hosts the server instance (local processes) will be able to connect to the server instance.

Specifying Listen Ports

Read the following guidelines when specifying listen ports and secure listen ports:

- The default value for port number is 7001.
- Although you can specify any valid port number, if you specify port 80, you can omit the port number from the HTTP request used to access resources over HTTP. For example, if you define port 80 as the listen port, you can use the URL:
`http://hostname/myfile.html` instead of
`http://hostname:portnumber/myfile.html`.
- On some operating systems, port 80 can be accessed only by processes run under a privileged user or group ID. In this case, you can assign the server instance to a UNIX machine on which a Post-Bind UID or GID is defined.
- In a development environment, you might want to run multiple instances of Oracle WebLogic Server on a single computer. If you do so, each instance must use a unique listen port/listen address combination. On a multi-homed computer, you can use the same listen port but you must configure each server to use a unique IP address as its listen address. If your computer does not support multiple IP addresses, you must use a different listen port for each active instance.

Configure Managed Servers

The **Configure Managed Servers** window prompts you to provide the configuration information for one or more [Managed Servers](#). Production environments typically deploy one or more Managed Servers, in addition to the [Administration Server](#), to host enterprise applications. (For details, see “[Introduction to Domains](#)” on page 1-1.) This step is optional.

Note: You can create Managed Servers on remote machines by using the `pack` and `unpack` commands. For more information, see “Creating and Starting a Managed Server on a Remote Machine: Main Steps” in *Creating Templates and Domains Using the Pack and Unpack Commands* at http://download.oracle.com/docs/cd/E12840_01/common/docs103/pack/tasks.html#remote.

To Configure Managed Servers:

1. Review the current list of Managed Server configurations. Default values may vary, based on the domain source you selected earlier.

2. The wizard provides two views: a concise tabular view of all the Managed Servers and an individual view of each Managed Server, where each server is represented by a tab—you switch between servers by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.
3. Add or modify entries as required by your domain, using the guidelines provided in the following table. To delete a Managed Server, select the Managed Server in the list and click **Delete**. When you finish updating your settings, click **Next**.

[Table 6-3](#) describes the fields required for configuring managed servers.

Note: Fields marked with an asterisk are required.

Table 6-3 Configure Managed Servers Window Fields

In this field...	Do the following...
Name*	<p>Enter a valid server name: a string of characters that can include spaces.</p> <p>Each server instance in your Oracle WebLogic environment must have a unique name, regardless of its function (Managed Server or Administration Server) and the domain or cluster in which it resides. In addition, the name of each Managed Server must be unique among all component names within the domain.</p> <p>The default value in this field is <code>new_Server_n</code>, where <code>n</code> specifies a numeric value used to differentiate among default Managed Server names; the value of <code>n</code> for the first Managed Server is 1. The value is incremented by 1 for each Managed Server that is added.</p> <p>Note: Note: The server name is included for identification purposes only; it is not used as part of the URL for applications that are deployed on the server. The server name is displayed in the Oracle WebLogic Server Administration Console. In addition, if you use Oracle WebLogic Server command-line utilities or APIs, you must specify this name to identify the managed server.</p>
Listen address	<p>Select a value for the listen address from the drop-down list. Valid values for the listen-address are as follows:</p> <ul style="list-style-type: none">• All Local Addresses (default)• IP address of the computer that hosts the server• DNS name that resolves to the host• localhost (valid only for requests that are issued from the computer on which the server is running) <p>If you identify a server instance's listen address as localhost, non-local processes cannot connect to the server instance. Only processes on the machine that hosts the server instance can connect to the server instance. If the server instance must be accessible as localhost (for example, if you create administrative scripts that connect to localhost), and it must also be accessible by remote processes, select All Local Addresses. The server instance determines the address of the machine and listens on it.</p> <p>If you intend to run the Managed Server on a remote machine, be sure to specify a valid IP address for the machine that will host the Managed Server.</p> <p>To learn more about listen addresses, see “Specifying Listen Ports” on page 6-6.</p>

Table 6-3 Configure Managed Servers Window Fields

In this field...	Do the following...
Listen port	<p>Enter a valid value for the listen port to be used for regular, non-secure requests (via protocols such as HTTP and T3). The default value is 7001. If you leave this field blank, the default value is used.</p> <p>The valid listen port range is from 1 to 65,534.</p> <p>If you intend to run the Managed Server on a remote machine, be sure to specify a valid listen port for the machine that will host the Managed Server.</p> <p>For more information, see “Specifying Listen Ports” on page 6-6.</p>
SSL listen port	<p>Enter a valid value to be used for secure requests (via protocols such as HTTPS and T3S). The default value is 7002. If you leave this field blank, the default value is used.</p> <p>The valid listen port range is from 1 to 65,535.</p> <p>Note: By default, a server instance uses demonstration certificates to authenticate requests from a secure port. In a production environment, you must configure SSL to use certificates from a certificate authority. For more information, see “Configuring SSL” in <i>Securing WebLogic Server</i> at http://download.oracle.com/docs/cd/E12840_01/wls/docs103/secmanage/ssl.html.</p> <p>For more information, see “Specifying Listen Ports” on page 6-6.</p>
SSL enabled	Select the check box to enable the SSL Listen Port. The default is disabled.

Note: Field marked with an asterisk are required.

Configure Clusters

A cluster is a group of Oracle WebLogic Server instances that work together to provide scalability and high-availability for applications. This window is displayed only if your domain contains at least one Managed Server.

The **Configure Clusters** window prompts you to configure the clusters in your domain. This step is optional.

To configure clusters:

1. Review the current list of cluster configurations. Default values may vary, based on the domain source you selected earlier.

Note: The wizard provides two views: a concise tabular view of all the clusters and an individual view of each cluster, where each cluster is represented by a tab—you switch between clusters by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.

2. Add or modify entries, as required by your domain, using the guidelines provided in the following table. To delete a cluster, select the cluster in the list, and click **Delete**. After you finish updating your settings, click **Next**.

Note: If you are creating a domain that includes Oracle Service Bus functionality, you can configure only one cluster per domain.

Table 6-4 describes the fields required to configure a cluster.

Note: Fields marked with an asterisk are required.

Table 6-4 Configure Clusters Window Fields

In this field...	Enter a...
Name*	Valid cluster name: a string of characters that can include spaces. The name of the cluster must be unique among all component names within the domain. The default value in this field is new_Cluster_n, where n specifies a numeric value that is used to differentiate among all default cluster names; the value of n for the first cluster is 1. The value is incremented by 1 for each cluster that is added.
Multicast address	Multicast address for the cluster. This address is used by cluster members to communicate with each other. The default value is 239.192.0.0. Valid multicast addresses are any valid IP addresses from 224.0.0.1 to 239.255.255.255.

Table 6-4 Configure Clusters Window Fields

In this field...	Enter a...
Multicast port	Multicast port for the cluster. The multicast port is used by cluster members to communicate with each other. The default value is 7001. Valid values for multicast ports are from 1 to 65534.
Cluster address	Cluster address that identifies the Managed Servers in the cluster. A cluster address can be one of the following: <ul data-bbox="462 591 1170 751" style="list-style-type: none">• Comma-separated list, without white space, of IP addresses or DNS names and ports, for example: dns_name:port,dns_name:port• DNS name that maps to multiple IP addresses• localhost, DNS name, or IP address if the listen address of all Managed Servers is listening to the same address with unique port numbers The cluster address is used in entity and stateless EJBs to construct the host name portion of URLs. If the cluster address is not set, EJB handles may not work properly.

Related Topics

[“Configure Managed Servers” on page 6-6](#)

“Setting Up WebLogic Clusters” in *Using WebLogic Server Clusters* at

http://download.oracle.com/docs/cd/E12840_01/wls/docs103/cluster/setup.htm
1

Assign Managed Servers to Clusters

The **Assign Servers to Clusters** window prompts you to assign the available Managed Server(s) to a cluster within the domain. This window is displayed only if you have defined at least one cluster.

To assign Managed Servers to clusters:

1. In the **Cluster** pane, select the cluster to which you want to assign a Managed Server.
2. Assign the Managed Server to the designated cluster in one of the following ways:
 - Double-click the name of the Managed Server in the **Server** pane.
 - Select the Managed Server and click the right arrow.
 - Shift-click to select multiple Managed Servers, then click the right arrow.

The name of the Managed Server is removed from the **Server** pane and added, below the name of the target cluster, to the **Cluster** pane.

Note: Only Managed Servers are listed in the **Server** pane. The Administration Server is not listed because it cannot be assigned to a cluster.

3. Repeat steps 1 and 2 for each Managed Server that you want to assign to a cluster.
4. Review the cluster assignments.

If necessary, you can remove a Managed Server from a cluster in one of the following ways:

- Double-click the name of the Managed Server in the **Cluster** pane.
- Select the Managed Server and click the left arrow.

The name of the Managed Server is removed from the **Cluster** pane and restored to the **Server** pane.

5. Click **Next** to proceed to the next configuration window.

Create HTTP Proxy Applications

The **Create HTTP Proxy Applications** window prompts you to create an HTTP proxy application on a Managed Server to proxy client requests to the cluster. An HTTP proxy application operates as an intermediary for HTTP requests.

Note: This window is displayed only if at least one Managed Server has been assigned to a cluster and at least one Managed Server has not been assigned to a cluster.

To create HTTP proxy applications:

1. If you have multiple clusters, select the tab corresponding to the cluster for which you want to create HTTP proxy applications.

2. Click **Create HTTP proxy for cluster *clustername***.

A list of the available servers is displayed in the **Proxy Server** drop-down list.

Note: Only Managed Servers that have not been assigned to a cluster are displayed in the drop-down list.

3. From the **Proxy Server** list, select a Managed Server onto which the proxy applications can be deployed.

A proxy application named `BEAProxy4_clustername_servername` is created and targeted to the Managed Server.

4. Repeat steps 1 through 3 for each cluster for which you want to create HTTP proxy applications.

5. Click **Next** to proceed to the next configuration window.

Configure Machines

The **Configure Machines** window prompts you to define the configuration information for the Windows and UNIX machines in the domain. This step is optional.

You may want to perform this step in circumstances such as (but not limited to) the following:

- The Administration Server uses the machine definition, in conjunction with the Node Manager application, to start remote servers.
- Oracle WebLogic Server uses configured machine names when determining which server in a cluster is best able to handle certain tasks, such as HTTP session replication. Oracle WebLogic Server then delegates those tasks to the identified server.

Note: You must create a machine configuration for each product installation that runs a Node Manager process. The machine configuration must include values for the listen address and port number parameters.

To configure Windows machines:

Select the **Machine** tab and review the current list of configurations for Windows machines. Add or modify entries as required by your domain using the guidelines provided in the following table. Default values may vary, based on the domain source you selected earlier. To delete a machine, select the machine in the list and click **Delete**. When you finish updating your settings, click **Next**.

[Table 6-5](#) describes the fields required to configure machine for Windows.

Note: Fields marked with an asterisk are required.

Table 6-5 Configure Machines Window Fields - Windows

In this field...	Do the following...
Name*	<p>Enter a valid machine name: a string of characters that can include spaces.</p> <p>The machine name:</p> <ul style="list-style-type: none">• Is used to identify the machine within the Oracle WebLogic Server domain; it is not required to match the network name for the machine.• Must be unique among all component names within the domain. <p>The default value in this field is new_Machine_n, where n specifies a numeric value that is used to differentiate among all default machine names; the value of n for the first machine is 1. The value is incremented by 1 for each machine that is added.</p>
Node manager listen address	<p>Select a value from the drop-down list for the listen address used by Node Manager to listen for connection requests. By default, the IP addresses defined for the local system and localhost are shown in the drop-down list. The default is localhost.</p> <ul style="list-style-type: none">• Valid values for the listen address are as follows:• IP address of the computer that hosts the server• DNS name that resolves to the host• localhost• All Local Addresses <p>If you specify an IP address for a machine that will host the Administration Server and you need to access the Oracle WebLogic Server Node Manager, you must disable host name verification. For details and instructions, see "Using Host Name Verification" in <i>Securing WebLogic Server</i> at the following URL:</p> <p>http://download.oracle.com/docs/cd/E12840_01/wls/docs103/secmanage/ssl.html#host_name_verifier</p>
Node manager listen port	<p>Enter a valid value for the listen port used by Node Manager to listen for connection requests.</p> <p>The valid Node Manager listen port range is from 1 to 65534.</p> <p>The default value is 5556.</p>

To configure UNIX machines:

Select the **UNIX Machine** tab and review the current list of UNIX machine configurations. Add or modify entries as required by your domain, using the guidelines provided in the following

table. Default values may vary, based on the domain source you selected earlier. To delete a machine, select the machine in the list and click **Delete**. When you finish updating your settings, click **Next**.

[Table 6-6](#) describes the fields required to configure machine for UNIX.

Note: Fields marked with an asterisk are required.

Table 6-6 Configure Machines Window Fields - Unix

In this field...	Do the following...
Name*	<p>Enter a valid machine name: a string of characters that can include spaces.</p> <p>The machine name:</p> <ul style="list-style-type: none"> Is used to identify the machine within the Oracle WebLogic Server domain; it is not required to match the network name for the machine. Must be unique among all component names within the domain. <p>The default value in this field is new_UnixMachine_ n, where n specifies a numeric value that is used to differentiate among all default machine names; the value of n for the first machine name is 1. The value is incremented by 1 for each machine that is added.</p>
Post bind GID enabled	Select the check box to enable a server running on this machine to bind to a UNIX group ID (GID) after it finishes all privileged startup actions (see Post bind GID). The default is Disabled (unchecked).
Post bind GID	Enter a valid UNIX group ID (GID) that a server running on this machine will run under after it finishes all privileged startup actions. Otherwise, the server continues to run under the group from which it was started. (Requires that you enable Post-Bind GID.)
Post bind UID enabled	Select the check box to enable a server running on this machine to bind to a UNIX user ID (UID) after it finishes all privileged startup actions (see Post bind UID). The default is Disabled (unchecked).
Post bind UID	Enter a valid UNIX user ID (UID) that a server running on this machine will run under after it finishes all privileged startup actions. Otherwise, the server continues to run under the account from which it was started. (Requires that you enable Post-Bind UID.)

Table 6-6 Configure Machines Window Fields - Unix

In this field...	Do the following...
Node manager listen address	<p>Select a value from the drop-down list for the listen address used by Node Manager to listen for connection requests. By default, the IP addresses defined for the local system and localhost are shown in the drop-down list. The default is localhost.</p> <ul style="list-style-type: none">Valid values for the listen address are as follows:IP address of the computer that hosts the serverDNS name that resolves to the hostlocalhostAll Local Addresses <p>If you specify an IP address for a machine that will host the Administration Server and need to access the Oracle WebLogic Server Node Manager, you must disable host name verification. For details and instructions, see "Using Host Name Verification" in <i>Securing WebLogic Server</i> at the following URL:</p> <p>http://download.oracle.com/docs/cd/E12840_01/wls/docs103/semanage/ssl.html#host_name_verifier</p>
Node manager listen port	<p>Enter a valid value for the listen port used by Node Manager to listen for connection requests.</p> <p>The valid Node Manager listen port range is from 1 to 65534.</p> <p>The default value is 5556.</p>

Related Topics

“Using Node Manager to Control Servers” in *Managing Server Startup and Shutdown* at http://download.oracle.com/docs/cd/E12840_01/wls/docs103/server_start/node_mgr.html

Assign Servers to Machines

The **Assign Servers to Machines** window prompts you to assign Oracle WebLogic Server instances to the machines on which they run.

Note: This window is displayed only if you have defined at least one machine.

To assign Oracle WebLogic Server instances to machines:

1. In the **Machine** pane, select the Windows or UNIX machine to which you want to assign a Oracle WebLogic Server instance.
2. Assign the appropriate Oracle WebLogic Server instance to the designated machine in one of the following ways:
 - Double-click the Oracle WebLogic Server instance in the **Server** pane.
 - Select the appropriate Oracle WebLogic Server instance in the **Server** pane and click the right arrow.
 - Shift-click to select multiple Servers in the Server pane, then click the right arrow.

The name of the Oracle WebLogic Server instance is removed from the **Server** pane and added, below the name of the target machine, to the **Machine** pane.

3. Repeat steps 1 and 2 for each Oracle WebLogic Server instance that you want to assign to a machine.
4. Review the machine assignments.

If necessary, you can remove a Oracle WebLogic Server instance from a machine in one of the following ways:

- Double-click the name of the appropriate Oracle WebLogic Server instance in the **Machine** pane
- Select the appropriate Oracle WebLogic Server instance in the **Machine** pane and click the left arrow

The name of the Oracle WebLogic Server instance is removed from the **Machine** pane and restored to the **Server** pane.

5. Click **Next** to proceed to the next configuration window.

If the domain source on which you are basing your domain contains JDBC data source and JMS file store definitions, you are presented with the option to modify them as described in [Chapter 8, “Customizing JDBC and JMS Settings in Oracle Service Bus Domains.”](#)

Otherwise, you are presented with the option to review the domain settings and create the domain.

Review the Domain Settings

The **Review WebLogic Domain** window allows you to review the detailed configuration settings of your domain before the Configuration Wizard creates it.

To review the domain settings:

1. Select an item in the **Domain Summary** pane on the left and review the associated details in the **Details** pane on the right. You can make limited adjustments by clicking **Previous** to return to a prior window.

Note: You can limit the type of information displayed in the **Domain Summary** pane by selecting a filter from the **View** drop-down list.

2. Click **Next** to proceed to the next configuration window, [“Create the WebLogic Domain” on page 4-10](#).

Customizing JDBC and JMS Settings in WebLogic Domains

When you are creating or extending a domain using the Configuration Wizard, you can change JDBC data source and JMS file store settings if they are defined in the domain or template that you selected as the source for domain that you are creating.

Note: If you select **Yes** in the **Customize Environment and Services Settings** window, the Configuration Wizard does not run any database automatically, even though domain JDBC is configured for PointBase database. In the **Run Database Scripts** dialog box, click **Run Scripts** screen, to load the respective database.

If you select **No** in the **Customize Environment and Services Settings** window, the Configuration Wizard automatically populates the required PointBase database.

The following topics describe the steps required to change the JDBC and JMS file store settings in your domain:

- [Configure JDBC Data Sources](#)
- [Test Data Source Connections](#)
- [Run Database Scripts](#)
- [Configure JMS File Stores](#)

Configure JDBC Data Sources

A JDBC data source contains a pool of database connections that are created when the data source instance is created—when it is deployed or targeted, or at server startup. Applications look up a

data source on the JNDI tree, and then request a connection. When the applications no longer needs the connection, they return the connections to the connection pool in the data source.

Note: No databases are defined in the `wls.jar` template; so, if you select the WebLogic Server template as the basis for the domain, the **Configure JDBC Data Sources** window is not displayed.

The **Configure JDBC Data Sources** window lets you configure the JDBC data sources defined in your domain source. This step is optional. If required, you can test the connections to the database using the **Test Connections** button.

Note: The values that you specify for your database in this window must match the actual configuration of the database. For example, if you change the name of the PointBase database for a preconfigured domain in the **DBMS name** field, a PointBase database configured with that name must exist.

1. Review the current list of JDBC data sources. Each data source is represented by a tab. You can view the information for a particular data source by selecting the corresponding tab. Default values may vary based on the domain source that you selected earlier.
2. Add or change entries as required for your domain. [Table 7-1](#) describes the fields of the **Configure JDBC Data Sources** window.

Note: Fields marked with an asterisk are required.

Table 7-1 Configure JDBC Data Sources

Field	Description
Name*	Enter a valid name for the JDBC data source. The name must be a string of characters and can include spaces. The name of the JDBC data source must be unique among all component names within the domain.
JNDI name*	From the drop-down list, select a JNDI name to which this data source is bound. <ul style="list-style-type: none">• To add a new JNDI name, select Add New and enter a valid JNDI path.• To change an existing JNDI name, select the name and edit it. You can associate multiple JNDI names with a single data source. When an application looks up a JNDI path, a <code>javax.sql.DataSource</code> instance corresponding to the data source is returned.
Database type*	From the drop-down list, select the type of database to which you want to connect. If your DBMS is not listed, select Other .

Table 7-1 Configure JDBC Data Sources

Field	Description
Driver*	<p>From the drop-down list, select the JDBC driver that you want to use to connect to the database. The list includes common JDBC drivers for the selected DBMS.</p> <p>If you selected Other in the Database type field, this field is not available.</p>
Class name*	<p>If you selected a DBMS in the Database type field, no action is required.</p> <p>If you selected Other in the Database type field, enter the full package name of the class that implements the <code>java.sql.Driver</code> interface for your DBMS.</p>
DBMS name*	<p>Enter the name of the database.</p> <p>If you selected Other in the Database type field, this field is not available.</p>
DBMS host*	<p>Enter the name of the server machine hosting the database.</p> <p>If you selected Other in the Database type field, this field is not available.</p>
DBMS port*	<p>Enter the port to be used to connect to the server. The default setting associated with the database selected is displayed.</p> <p>If you selected Other in the Database type field, this field is not available.</p>
JDBC URL*	<p>If you selected a DBMS in the Database type field, no action is required. If the Driver name has been set and a default URL exists, that URL is displayed in this field.</p> <p>If you selected Other in the Database type field, enter the URL that should be used to create the connections in the connection pool in the data source.</p>
User name*	<p>Enter the account login name required for connecting to the database.</p> <p>If you selected Other in the Database type field, this field is not available. This value can be specified in the Additional Properties field.</p>
User password*	<p>Enter a password that is valid for accessing the database. Valid values consist of a string of alphanumeric characters. The hyphen (-) and underscore (_) characters are supported.</p> <p>This password overrides the password entered as part of the JDBC Properties.</p> <p>The value is encrypted.</p>
Confirm user password*	<p>Re-enter the user password.</p>

Table 7-1 Configure JDBC Data Sources

Field	Description
Known properties	<p>If you selected a DBMS in the Database type field, no action is required. This field displays the properties list that is passed to the JDBC driver for creation of physical database connections.</p> <p>If you selected Other in the Database type field, this field is blank and not available.</p>
Additional properties	<p>Enter any additional properties to be passed to the JDBC driver.</p> <p>If you specified Other in the Database type field, enter any properties to be passed to the JDBC driver, such as the property needed to specify the user.</p>
Supports global transactions	<p>If you selected an XA driver in the Driver field, Supports global transactions and Two-phase commit protocol are selected automatically. You cannot change the protocol.</p> <p>If you selected a non-XA driver in the Driver field, you can, if required, select Supports global transactions. Then, you can select one of the following protocols:</p> <ul style="list-style-type: none"> • Logging Last Resource—With this option, the transaction branch in which the connection is used is processed as the last resource in the transaction and is processed as a one-phase commit operation. The result of the operation is written in a log file on the resource itself, and the result determines the success or failure of the prepare phase of the transaction. This option offers some performance benefits with greater data safety than Emulate Two-Phase Commit, but it has some limitations. For more information, see Understanding the Logging Last Resource Transaction Option in <i>Configuring and Managing WebLogic JDBC</i>. • Emulate two-phase commit—With this option, the transaction branch in which the connection is used always returns success for the prepare phase of the transaction. It offers performance benefits, but also has risks to data in some failure conditions. Select this option only if your application can tolerate heuristic conditions. For more information, see Understanding the Emulate Two-Phase Commit Transaction Option in <i>Configuring and Managing WebLogic JDBC</i>. • One phase commit (default)—With this option, a connection from the data source can be the only participant in the global transaction and the transaction is completed by using a one-phase commit optimization. If more than one resource participates in the transaction, an exception is thrown.

3. After updating the settings, do one of the following:

- If you want to test the data source connections to the specified databases, click **Test Connections**. The **Test Data Source Connections** window is displayed. For more information, see [Test Data Source Connections](#).

- If you do not want to test the connections to the database, click **Next**.

Test Data Source Connections

The **Test Data Source Connections** window allows you to test the connection to the database for each of the data sources defined in your domain, by using the JDBC URL defined for the database. This window is only displayed if you clicked **Test Connections** on the **Configure JDBC Data Sources** window.

A list of the data sources and the associated JDBC URLs is displayed.

1. Make sure that the database to which you want to test the connections is running.
2. Click **Test** for the connection that you want to test.

The button changes to **Cancel**. You can press **Cancel** at any time to cancel the test. Once a test is in progress, all the other **Test** buttons are disabled.

The **Status** field is blank for connections for which the test has not been initiated.

3. Review the results of the test in the **Connection Result Log** pane.
4. Perform the test for each data source, as required.
5. Click **OK** to return to the **Configure JDBC Data Sources** window.

Run Database Scripts

A domain template might contain a set of SQL files organized by database type. If the domain template contains SQL files, you can run them while creating the domain, in the **Run Database Scripts** window. Database content for each of the data sources defined in your domain is set up by using pre-existing SQL or database loading files.

Notes: No databases are defined in the `wls.jar` template; so, if you selected the WebLogic Server template as the basis for the domain, the **Configure JDBC Data Sources** window and the **Run Database Scripts** window are not displayed.

When you use PointBase in production mode, it is mandatory to run the database scripts. In development mode, this step is not mandatory.

If you use the default PointBase database, you do not need to start the database server before running the scripts. For all other databases, the database server must be running to execute the SQL scripts.

1. In the **Available JDBC Data Sources** pane, select the data source for which you want to run the scripts. The scripts that can be executed are displayed in the **Available SQL Files and Database Loading Options**.
2. Select the database version from the **DB Version** drop-down menu.
3. Click **Run Scripts**.

All the scripts displayed in the **Available SQL Files and Database Loading Options** pane for the selected data source are executed, and the results are displayed in the **Results** pane. If you want to capture test output in a log file, select the **Log File** check box and specify the location of the log file.

4. Repeat steps 1 through 3 for each data source for which you want to execute SQL scripts.
5. Click **Next**.

Configure JMS File Stores

A JMS file store is a disk-based file in which persistent messages can be saved.

You can modify the JMS file stores that are configured in your domain, in the **Configure JMS File Stores** window, which is displayed when you click **Next** in the **Run Database Scripts** window. This step is optional.

1. Review the current list of JMS file stores. Default values may vary based on the domain source that you selected earlier.

Note: The wizard provides two display modes: a concise tabular view of all the defined components, and an individual view, in which each component is represented by a tab, and you view a particular component by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.

2. Modify the settings, as required for your domain.

Table 7-2 describes the fields of the **Configure JMS File Stores** window.

Table 7-2 Configure JMS File Stores

Field	Description
Name*	<p>Enter a name for the JMS file store. The name must be a string of characters and can include spaces.</p> <p>The name of the JMS file store must be unique among all component names within the domain.</p>
Directory	<p>Enter the path of the directory (in your system) in which the JMS file store resides.</p>
Synchronous write policy	<p>From the drop-down list, select one of the following synchronous write policies to determine how the file store writes data to the disk:</p> <ul style="list-style-type: none">• Cache-Flush: Transactions cannot be completed until all their write operations have been flushed to the disk.• Direct-Write: Write operations are performed directly to the disk. This policy is supported on Solaris and Windows. If this policy is active on an unsupported platform, the file store switches automatically to the cache-flush policy.• Disabled: Transactions are complete as soon as the writes are cached in memory. When this policy is active, completion of transactions does not depend on waiting for writes to reach the disk. <p>This setting affects performance, scalability, and reliability.</p> <p>Note: The use of the direct-write policy is transactionally reliable in Solaris systems, but Windows systems may leave transaction data in the on-disk cache without writing it to disk immediately. This is not considered to be transactionally reliable because a power failure can cause loss of on-disk cache data, possibly resulting in lost and/or duplicate messages. For reliable writes using direct-write on Windows, either disable all write caching for the disk (enabled by default), or use a disk with a battery-backed cache. Some file systems, however, do not allow this value to be changed (for example, a RAID system that has a reliable cache).</p> <p>Note: If the JMS file store is used exclusively for paging non-persistent messages to the disk, the synchronous write policy is ignored.</p>

3. After updating the settings, click **Next**.

Related Topics

[Creating a Custom \(User-Defined\) File Store](#) in *Configuring WebLogic Server Environments*

Customizing JDBC and JMS Settings in Oracle Service Bus Domains

When you are creating or extending a domain using the Configuration Wizard, you have the option to modify JDBC data source and JMS file store settings if they were previously defined in your domain or template.

The following topics describe the steps required to change the JDBC and JMS file store settings in your domain:

- [Configure JDBC Data Sources](#)
- [Test Data Source Connections](#)
- [Run Database Scripts](#)
- [Configure JMS File Stores](#)
- [Review the Domain Settings](#)

Configure JDBC Data Sources

A JDBC data source contains a pool of database connections that are created when the data source instance is created—when it is deployed or targeted, or at server startup. Applications look up a data source on the JNDI tree, and then request a connection. When finished with the connection, the application returns the connection to the connection pool in the data source.

The **Configure JDBC Data Sources** window prompts you to configure the JDBC data sources defined in your domain source. This step is optional. If desired, you can also test the connections to the database using the **Test Connections** button.

Note: The values that you specify for your database in this window must match the actual configuration of the database. For example, if you change the name of the PointBase database for a preconfigured domain in the **DBMS name** field, there must be an actual PointBase database configured with that name.

To configure JDBC data sources:

1. Review the current list of JDBC data sources. Each data source is represented by a tab. You can view the information for a particular data source by selecting the corresponding tab. Default values may vary, based on the domain source you selected in the **Select A Domain Source** window.
2. Add or modify entries as required by your domain, using the guidelines provided in the following table. When you finish updating your settings, do one of the following:
 - If you want to test the data source connections to the specified databases, click **Test Connections**. The **Test Data Source Connections** window is displayed. For more information, see [“Test Data Source Connections” on page 8-7](#).
 - If you do not want to test the connections to the database, click **Next**.

[Figure 8-1](#) illustrates the JDBC Data Sources window for Oracle Service Bus domains.

Figure 8-1 Configure JDBC Data Sources window

Oracle WebLogic Configuration Wizard

Configure JDBC Data Sources

Edit the configuration information for the JDBC data sources. A data source contains a pool of database connections. Your application looks up a data source in the JNDI tree, requests a connection, uses it, then returns it to the connection pool in the data source.

cgDataSource | wlsbjmsrpDataSource | cgDataSource-nonXA

*Name: cgDataSource

JNDI name: cgDataSource

*Database type: PointBase

*Driver: *PointBase's Driver (Type 4) Versions:4.X,5.X

*Class name: com.pointbase.jdbc.jdbcUniversalDriver

Supports global transactions

Two phase commit

Logging last resource

Emulate two phase commit

One phase commit

*DBMS name: weblogic_eval *User name: weblogic

*DBMS host: localhost *User password: *****

*DBMS port: 9093 *Confirm user password: *****

*JDBC URL: jdbc:pointbase:server://localhost:9093/weblogic_eval

Known properties: user=weblogic;databaseName=jdbc:pointbase:server://localhost:9093/weblogic_eval

Additional properties:

Note: Fields marked with an asterisk are required.

Table 8-1 Configure JDBC Data Sources Window - Fields

In this field...	Do the following...
Name*	<p>Enter a valid name for a JDBC data source: a string of characters that can include spaces.</p> <p>The name of the JDBC data source must be unique among all component names within the domain.</p>
JNDI name*	<p>From the drop-down list, select a JNDI name to which this data source is bound.</p> <p>To add a new JNDI name, select Add New and enter a valid JNDI pathname.</p> <p>To modify an existing JNDI name, select the name and edit as required.</p> <p>Note: You can associate multiple JNDI names with a single data source.</p> <p>When an application looks up a JNDI path, a <code>javax.sql.DataSource</code> instance corresponding to the data source is returned.</p>
Database type*	<p>From the drop-down list, select the type of database to which you want to connect. If your DBMS is not listed, select <code>Other</code>.</p>
Driver*	<p>From the drop-down list, select the JDBC driver you want to use to connect to the database. The list includes common JDBC drivers for the selected DBMS.</p> <p>If you selected <code>Other</code> in the Database type field, this field is not available.</p>
Class name*	<p>If you selected a DBMS in the Database type field, no action is required.</p> <p>If you selected <code>Other</code> in the Database type field, enter the full package name of the class that implements the <code>java.sql.Driver</code> interface for your DBMS.</p>
DBMS name*	<p>Enter the name of the database.</p> <p>If you selected <code>Other</code> in the Database type field, this field is not available.</p>
DBMS host*	<p>Enter the name of the server machine hosting the database.</p> <p>If you selected <code>Other</code> in the Database type field, this field is not available.</p>
DBMS port*	<p>Enter the port to be used to connect to the server. The default setting associated with the database selected is displayed.</p> <p>If you selected <code>Other</code> in the Database type field, this field is not available.</p>

Table 8-1 Configure JDBC Data Sources Window - Fields

In this field...	Do the following...
JDBC URL*	<p>If you selected a DBMS in the Database type field, no action is required. If the Driver Name has been set and a default URL exists, that URL is used as the value of this field.</p> <p>If you selected Other in the Database type field, enter the URL for the database that is used to create the connections in the connection pool in the data source.</p>
User name*	<p>Enter the account login name required for connecting to the database.</p> <p>If you selected Other in the Database type field, this field is not available. This value can be specified in the Additional Properties field.</p>
User password*	<p>Enter a password that is valid for accessing the database. Valid values consist of a string of alphanumeric characters. The hyphen (-) and underscore (_) characters are supported.</p> <p>This password overrides the password entered as part of the JDBC Properties.</p> <p>The value is encrypted.</p>
Confirm user password*	<p>Re-enter the user password.</p>
Known properties	<p>If you selected a DBMS in the Database type field, no action is required. This field displays the properties list passed to the JDBC driver for use in the creation of physical database connections.</p> <p>If you selected Other in the Database type field, this field is blank.</p>

Table 8-1 Configure JDBC Data Sources Window - Fields

In this field...	Do the following...
Additional properties	<p>Enter any additional properties to be passed to the JDBC driver.</p> <p>If you specified Other in the Database type field, enter any properties to be passed to the JDBC driver, such as the property needed to specify the user.</p>
Supports global transactions	<p>If you selected an XA driver in the Driver field:</p> <ul style="list-style-type: none">• Supports global transactions and Two-phase commit protocol are selected by default and cannot be changed. <p>If you selected a non-XA driver in the Driver field:</p> <ul style="list-style-type: none">• Supports global transactions may be selected, if desired.• If Supports global transactions is selected, select one of the following protocols: <p>Logging Last Resource—With this option, the transaction branch in which the connection is used is processed as the last resource in the transaction and is processed as a one-phase commit operation. The result of the operation is written in a log file on the resource itself, and the result determines the success or failure of the prepare phase of the transaction. This option offers some performance benefits with greater data safety than Emulate Two-Phase Commit, but it has some limitations. For more information, see "Understanding the Logging Last Resource Transaction Option" in <i>Configuring and Managing WebLogic JDBC</i> at: http://download.oracle.com/docs/cd/E12840_01/wls/docs103/jdbc_admin/jdbc_datasources.html#llr.</p> <p>Emulate two-phase commit—With this option, the transaction branch in which the connection is used always returns success for the prepare phase of the transaction. It offers performance benefits, but also has risks to data in some failure conditions. Select this option only if your application can tolerate heuristic conditions. For more information, see "Understanding the Emulate Two-Phase Commit Transaction Option" in <i>Configuring and Managing WebLogic JDBC</i> at: http://download.oracle.com/docs/cd/E12840_01/wls/docs103/jdbc_admin/jdbc_datasources.html#emulate2pc.</p> <p>One-phase commit (default)—With this option, a connection from the data source can be the only participant in the global transaction and the transaction is completed using a one-phase commit optimization. If more than one resource participates in the transaction, an exception is thrown.</p>

Related Topics

“Configuring JDBC Data Sources” in *Configuring and Managing WebLogic JDBC* at:
http://download.oracle.com/docs/cd/E12840_01/wls/docs103/jdbc_admin/jdbc_d_atasources.html

Test Data Source Connections

The **Test Data Source Connections** window allows you to test the connection to the database for each of the data sources defined in your domain, using the JDBC URL defined for the database. This window is only displayed if you clicked **Test Connections** on the **Configure JDBC Data Sources** window.

A list of the data sources and the associated JDBC URLs is displayed.

To test the connections to the database:

1. Make sure that the database to which you want to test the connections is running.
2. Click **Test** for the data source connection that you want to test.

Note: When you press **Test** for a data source, the button changes to **Cancel**. You can press **Cancel** at any time to cancel the test. Once a test is in progress, all other **Test** buttons are disabled.

If the status field is empty, the test has not been initiated.

3. Review the results of the test in the **Connection Result Log** pane.
4. Repeat for each data source, as desired.
5. Click **OK** to return to the **Configure JDBC Data Sources** window.

Run Database Scripts

The **Run Database Scripts** window prompts you to set up the database content for each of the data sources defined in your domain using pre-existing SQL or database loading files. A domain template may contain a set of SQL files organized by database type. This window is displayed only if the domain template contains one or more SQL files.

Note: There are no databases defined in `wls.jar`; therefore, the **Configure JDBC Data Sources** dialog box is not displayed when you select WLS template to create a domain. If you select the Oracle WebLogic Platform template, the **Configure JDBC Data Sources** dialog box is displayed, but the **Load Database** dialog box is not displayed.

Note: While using PointBase in Development Mode it is optional to click Run Scripts to load the scripts, and it is mandatory to click Run Scripts in the Production Mode to load scripts.

If you are using the default PointBase database, you do not need to start the database server before running the scripts. For all other databases, your database server must be running to execute the SQL scripts.

To set up the database content:

1. In the **Available JDBC Data Sources** pane, select the data source for which you want to run the scripts. The scripts that will be executed are displayed in the **Available SQL Files and Database Loading Options**.
 - If you are using the Portal template:
 - Choose `p13n` DataSource, and then click **Run Scripts**.
 - If you are maintaining Application GroupSpace data in a different database, choose `apps` GroupSpace DataSource, and then click **Run Scripts**.
 - If you are using the Oracle WebLogic Service Bus Extension (Oracle Service Bus template), choose `wlsjmsrp`DataSource.
 - If you are using scripts that you have created and loaded along with your application already, choose any of the available datasources.
2. Select the database version from the **DB Version** drop-down menu.
3. Click **Run Scripts**.

All the scripts displayed in the **Available SQL Files and Database Loading Options** pane for the selected data source are executed, and the results are displayed in the **Results** pane. If you prefer to capture test output in a log file, select the **Log File** check box and manually enter the location of the log file or click **Browse** to navigate to the name of the desired log file.

4. Repeat steps 1 through 3 for each data source for which you want to execute SQL scripts.
5. Click **Next** to proceed to the next configuration window.

Configure JMS File Stores

A JMS file store is a disk-based file in which persistent messages can be saved.

The **Configure JMS File Stores** window allows you to modify JMS file stores that are configured in your domain. This step is optional.

To configure JMS file stores:

1. Review the current list of JMS file stores. Default values may vary based on the domain source you selected earlier.

Note: The wizard provides two display modes: a concise tabular view of all the defined components, and an individual view, in which each component is represented by a tab, and you view a particular component by selecting the corresponding tab. To toggle the display mode between table and tab formats, click **Switch Display**.

2. Modify entries, as required by your domain, using the guidelines provided in the following table. When you finish updating your settings, click **Next**.

Note: Fields marked with an asterisk are required.

Table 8-2 Configure JMS File Stores Window

In this field...	Do the following...
Name*	Enter a name for the JMS file store: a string of characters that can include spaces. The name of the JMS file store must be unique among all component names within the domain.

Table 8-2 Configure JMS File Stores Window

In this field...	Do the following...
Directory	Enter the pathname of the directory on the file system where the JMS file store is kept. This directory must reside on your system.
Synchronous	<p data-bbox="284 468 1180 520">From the drop-down list, select one of the following synchronous write policies to determine how the file store writes data to disk:</p> <ul data-bbox="284 527 1180 822" style="list-style-type: none"><li data-bbox="284 527 1180 597">• Cache-Flush—specifies that transactions cannot be completed until all their write operations have been flushed down to disk.<li data-bbox="284 604 1180 690">• Disabled—specifies that transactions are complete as soon as their writes are cached in memory. When this policy is active, the completion of transactions does not depend on waiting for writes to reach the disk.<li data-bbox="284 697 1180 784">• Direct-Write—specifies that write operations are performed directly to disk. This policy is supported on Solaris and Windows. If this policy is active on an unsupported platform, the file store automatically switches to the Cache-Flush policy.<li data-bbox="284 791 1180 822">• Unspecified (default) <p data-bbox="284 836 1180 864">This parameter setting affects performance, scalability, and reliability.</p> <p data-bbox="284 878 1180 1114">Note: Although the use of the Direct-Write policy is transactionally reliable on Solaris systems, Windows systems may leave transaction data in the on-disk cache without writing it to disk immediately. This is not considered to be transactionally reliable, since a power failure can cause loss of on-disk cache data—possibly resulting in lost and/or duplicate messages. For reliable writes using Direct-Write on Windows, either disable all write caching for the disk (enabled by default), or use a disk with a battery-backed cache. Some file systems, however, do not allow this value to be changed (for example, a RAID system that has a reliable cache).</p> <p data-bbox="284 1128 1180 1190">Note: If the JMS file store is used exclusively for paging non-persistent messages to disk, the synchronous write policy is ignored.</p>

Related Topics

“Creating a Custom (User-Defined) File Store” in *Configuring WebLogic Server Environments* at:

http://download.oracle.com/docs/cd/E12840_01/wls/docs103/config_wls/store.html#CreatingCustomFileStore

Review the Domain Settings

The **Review WebLogic Domain** window allows you to review the detailed configuration settings of your domain before the Configuration Wizard creates it.

To review the domain settings:

1. Select an item in the **Domain Summary** pane on the left and review the associated details in the **Details** pane on the right. You can make limited adjustments by clicking **Previous** to return to a prior window.

Note: You can limit the type of information displayed in the **Domain Summary** pane by selecting a filter from the **View** drop-down list

2. Click **Next** to proceed to the next configuration window, [Chapter 3, “Creating a WebLogic Domain.”](#)

Extending WebLogic Domains

You can add product component functionality, or additional applications and services to an existing domain by extending it using the Configuration Wizard. For example, if you created a base WebLogic Server domain and you want to add the Avitek Medical Records Examples functionality, you must extend the domain by using the `medrec.jar` template.

The Configuration Wizard simplifies the task of extending an existing domain by using extension templates. For more information about domain templates, see [Domain Template Reference](#).

The following topics describe the steps required to extend an existing domain by using the Configuration Wizard:

- [Choose to Extend a Domain](#)
- [Select a WebLogic Domain Directory](#)
- [Select the Extension Source](#)
- [Customize JDBC and JMS File Store Settings](#)
- [Extend Your WebLogic Domain](#)

Note: You cannot extend an active domain by using the Configuration Wizard. Before you proceed with extending a domain, make sure that the servers in the domain are not running.

Choose to Extend a Domain

The **Welcome** window of the Configuration Wizard prompts you to choose whether you want to create a new domain or extend an existing domain by adding product component functionality, applications and services.

Select **Extend an existing WebLogic domain** and click **Next**.

Select a WebLogic Domain Directory

The **Select a WebLogic Domain Directory** window prompts you to select the existing domain that you want to update with additional applications or services.

1. Use the navigation tree to select a valid domain directory (a directory that contains a **config.xml** file in the **config** directory of the domain. A valid domain directory is indicated by the  icon.
2. Click **Next**.

Select the Extension Source

The **Select Extension Source** window prompts you to select the source from which to extend your domain. You can select products to add to your domain, or extend your domain by using an existing extension template.

1. Choose one of the following options:
 - **Extend my domain automatically to support the following added products:**
Select the check boxes for the products that you want to add to your domain. The products already included in your domain are indicated by a grayed-out check box.
 - **Extend my domain using an existing extension template**
Specify the path to the extension template in the **Template location** field and click **Next**.
2. Click **Next**.

Customize JDBC and JMS File Store Settings

The **Customize JDBC and JMS File Store Settings** window lets you modify existing JDBC and JMS file store settings. If you choose not to customize any JDBC or JMS settings by accepting the default (**No**), you proceed directly to extending the domain.

For information about customizing JDBC data sources and JMS file stores, see [Configure JDBC Data Sources](#) and [Configure JMS File Stores](#).

Extend Your WebLogic Domain

The **Extend WebLogic Domain** window displays the name and location for your domain.

If the domain contains an applications directory and the domain extension does not contain application files, the location for that directory is also displayed.

1. If the domain extension contains application files, specify the path to the applications directory in the **Applications location** field.
2. Click **Extend** to extend the domain with the applications, services, and settings based on the specified extension template.

The **Creating Domain** window displays status messages during the domain extension process. The Configuration Wizard updates the **config.xml** file and other application-specific components in the domain directory, as defined by the domain template. When the process is complete, the updated domain is ready for use.

3. Click **Done**.

Extending Oracle Service Bus Domains

You can add product component functionality, or additional applications and services to an existing domain by extending it using the Configuration Wizard. For example, if you created a base Oracle WebLogic Server domain and you want to add the Avitek Medical Records Examples functionality, you must extend the domain by adding the `medrec.jar` template to it.

The Configuration Wizard simplifies the task of extending an existing domain by using extension templates. Oracle delivers a set of predefined extension templates, which are described in *Domain Template Reference* at the following URL:

http://download.oracle.com/docs/cd/E12840_01/common/docs103/tempref/index.html

The following topics describe the steps required to extend an existing domain using the Configuration Wizard:

- [Choose to Extend a Domain](#)
- [Select an Oracle WebLogic Domain Directory](#)
- [Select the Extension Source](#)
- [Customize JDBC and JMS Settings](#)
- [Extend Your Oracle WebLogic Domain](#)

Note: Make sure that the servers in the domain are not running; you cannot extend an active domain using the Configuration Wizard.

Related Topics

[“Extending an Existing Domain” on page 11-2](#)

Choose to Extend a Domain

The **Welcome** window prompts you to choose whether you want to create a new domain or extend an existing domain by adding product component functionality, applications and services.

Choose **Extend an existing WebLogic domain** and click **Next**.

Select an Oracle WebLogic Domain Directory

The **Select a WebLogic Domain Directory** window prompts you to select an existing domain that you want to update with additional applications or services.


To select a WebLogic domain directory:

1. Use the navigation tree to select a valid domain directory: a directory that contains a `config.xml` file in the `config` directory of the domain. A valid domain directory is indicated by the  icon.
2. Click **Next** to proceed to the next configuration window.

Select the Extension Source

The **Select Extension Source** window prompts you to select the source from which to extend your domain. You can select product components to add to your domain, or extend your domain using an existing extension template.

Figure 10-1 Select Extension Source Window

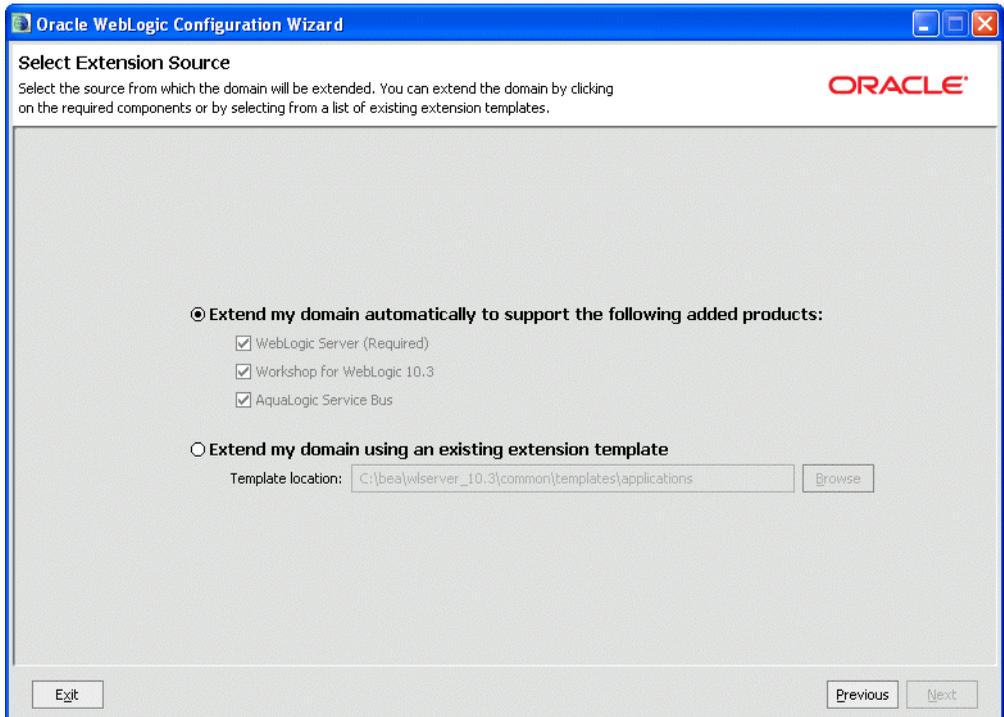

To select the source from which to extend your domain:

1. Choose one of the following options:
 - Select **Extend my domain automatically to support the following added products:**

To use this option, simply check the boxes for the components you want to add to your domain. The components already included in your domain are indicated by a grayed-out check box.
 - Select **Extend my domain using an existing extension template:**

To use this option, you can manually enter the pathname to the extension template in the **Template location** field and click **Next**.

Alternatively, you can click **Browse** to invoke the **Select a Template** dialog box. The default directory lists the predefined extension templates provided with your product installation. Use the drop-down arrow in the **Look In:** field to navigate to an alternate

directory if desired. Select the desired extension template and click **OK** to return to the **Select Extension Source** window.

2. Click **Next** to proceed to the next configuration window.

Customize JDBC and JMS Settings

The **Customize JDBC and JMS Settings** window gives you the option to modify existing JDBC and JMS file store settings. If you choose not to customize any JDBC or JMS settings by accepting the default (**No**), you proceed directly to extending the domain.

The following topics summarize the settings you can change:

- **Configure JDBC Data Sources**

You can edit the settings for the JDBC Data Sources configured in your domain. For more information about the settings in this window, see [“Configure JDBC Data Sources” on page 8-1](#).

- **Configure JMS File Stores**

If your domain contains a JMS file store, this window prompts you to configure JMS file stores as required for your domain. For more information about the settings in this window, see [“Configure JMS File Stores” on page 8-8](#).

Extend Your Oracle WebLogic Domain

The **Extend WebLogic Domain** window displays the read-only name and location for your domain. If your domain contains an applications directory and the domain extension does not contain application files, the location for that directory is also displayed. However, if your domain extension contains application files, you are prompted to provide the pathname to the applications directory in the **Applications Location** field.

1. Once you have defined the applications directory, if required, click **Extend** to extend the domain with the applications, services, and settings provided from the specified extension template.

The **Creating Domain** window is opened to display status messages during the update process. The Configuration Wizard updates the `config.xml` file and other application-specific components in the domain directory, as defined by the domain template.

When the process is complete, the updated domain is ready.

2. Click **Done** in the **Creating Domain** window.

Examples: Using the Configuration Wizard

This section provides information and examples for common domain configuration tasks that you can perform by using the Configuration Wizard:

- [Creating a Domain](#)
- [Extending an Existing Domain](#)
- [Creating a Domain with Managed Servers and Clusters](#)

Creating a Domain

The following example describes how to create a WebLogic Server domain.

1. Start the Configuration Wizard in graphical mode.
 - On Windows, choose **Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard**
 - On UNIX, go to the `/common/bin` subdirectory of the product installation directory, and enter `sh config.sh`.
2. In the **Welcome** window, select **Create a new WebLogic domain** and click **Next**.
3. In the **Select a Domain Source** window:
 - a. Select **Generate a domain configured automatically to support the following products**.

Note that the **WebLogic Server** check box is selected by default because it is a prerequisite for all WebLogic domains.

- b. Click **Next**.
4. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click **Next**. This username is used to boot the administration server and connect to it.
5. In the **Configure Server Start Mode and JDK** window, specify whether to start the server in development mode or production mode, and select the JDK. Then, click **Next**.
6. In the **Customize Environment and Services Settings** window, indicate whether you want to change the distribution of your domain across servers, clusters, and machines, or modify existing JDBC and JMS file store services.
 - To add managed servers and clusters to your domain, or change JDBC and JMS settings, select **Yes** and click **Next**.
 - To accept the default settings, leave **No** selected and click **Next**.

In this example, we are not customizing the domain. Leave **No** selected and click **Next**.

7. In the **Create WebLogic Domain** window, enter a name for the domain and specify a location for the domain directory.

For example, enter `my_default_domain` as the name.

By default, the domain is created in `BEA_HOME\user_projects\domains\domain`, where `BEA_HOME` is the directory that contains the product installation, and `domain` is the name that you specified (`my_default_domain` in this example).

Click **Create**.

8. In the **Creating Domain** window, after the domain has been created, do one of the following:
 - If you want to start the server immediately, select the **Start Admin Server** check box and click **Done**. This option is available only for Windows systems.
 - If you do not want to start the server at this time, click **Done**.

Extending an Existing Domain

This example illustrates the procedure to extend the WebLogic Server domain that you created in [Creating a Domain](#), by using the Workshop extension template.

Note: Make sure that the servers in the domain are not running; you cannot update an active domain.

1. Start the Configuration Wizard in graphical mode.
 - On Windows, choose **Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard**

On UNIX, go to the `/common/bin` subdirectory of the product installation directory, and enter `sh config.sh`.
2. In the **Welcome** window, choose **Extend an existing WebLogic domain** and click **Next**.
3. In the **Select a WebLogic Domain Directory** window, navigate to the domain directory that you want to extend. Valid domain directories are indicated by the  icon. Select the domain to be extended and click **Next**.

For this example, navigate to `BEA_HOME\user_projects\domains` and select `my_default_domain`.

4. In the **Select Extension Source** window, you can choose to extend your domain by selecting products or an extension template.

To extend your domain by using the Workshop extension template:

 - a. Select **Extend my domain automatically to support the following added products**.
 - b. Select the **Workshop for WebLogic** check box and click **Next**.
5. In the **Customize JDBC and JMS Settings** window, you have the option to customize JDBC and JMS file store settings if they were previously defined in the domain or in the extension template.
 - To customize the JDBC and JMS file store settings, select **Yes** and click **Next**.
 - To accept the default settings, leave **No** selected and click **Next**.

For this example, leave **No** selected and click **Next**.

6. In the **Extend WebLogic Domain** window, you can specify an applications directory to contain the application files that are being added to the domain.

Click **Extend**.

7. In the **Creating Domain** window, click **Done** to close the Configuration Wizard.

Creating a Domain with Managed Servers and Clusters

This example describes the procedure to create a Workshop domain that is based on the basic WebLogic Server domain template, and to customize the domain to include the following:

- Two managed servers

A managed server hosts application components and resources, which are deployed and managed as part of the domain.

The two managed servers are in addition to the administration server.

- A single cluster

A cluster is a group of WebLogic Server instances that work together to provide scalability and high availability for applications. Clusters can improve performance and provide failover if a server instance becomes unavailable. The servers within a cluster can run on the same machine or on different machines. To the client, a cluster appears as a single WebLogic Server instance.

In this example, all the servers and the cluster created by the Configuration Wizard are intended to run on your local machine.

1. Start the Configuration Wizard in graphical mode.
 - On Windows, choose **Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard**
 - On UNIX, go to the `/common/bin` subdirectory of the product installation directory, and enter `sh config.sh`.
2. In the **Welcome** window, select **Create a new WebLogic domain** and click **Next**.
3. In the **Select a Domain Source** window:
 - a. Select **Generate a domain configured automatically to support the following products**.

Note that the **WebLogic Server** check box is selected by default since it is a prerequisite for all WebLogic domains.
 - b. Select the **Workshop for WebLogic** check box and click **Next**.
4. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click **Next**. This username is used to boot the administration server and connect to it.

5. In the **Configure Server Start Mode and JDK** window, specify whether to start the server in development mode or production mode, and select the JDK.
6. Click **Next**.
7. In the **Customize Environment and Services Settings** window, select **Yes** and click **Next**.
8. In the **Configure RDBMS Security Store Database** window, click **Next**.
9. In the **Configure the Administration Server** window,
 - a. enter the following values:
 - **Name:** `MyAdminServer`
 - **Listen address:** `127.0.0.1`
 - **Listen port:** `7001`
 - **SSL listen port:** `7002`
 - b. Select the **SSL enabled** check box.
 - c. Click **Next**.
10. In the **Configure Managed Servers** window, add two managed servers **MS1** and **MS2**:
 - a. Click **Add**, and configure the first managed server with the following details:
 - Name:** `MS1`
 - Listen address:** `127.0.0.1`
 - Listen port:** `8001`
 - SSL listen port:** `8011`
 - b. Click **Add**, and configure the second managed server with the following details:
 - Name:** `MS2`
 - Listen address:** `127.0.0.1`
 - Listen port:** `8101`
 - SSL listen port:** `8111`
 - c. Select the **SSL enabled** check box.
 - d. Click **Next**.

11. In the **Configure Clusters** window, configure a cluster named **MY_CLUSTER**:

- a. Click **Add** and configure the cluster with the following details:

Name: **MY_CLUSTER**

Multicast address: **239.192.0.0**

Multicast port: **8050**

Cluster address: **127.0.0.1**

Note: All the managed servers listen at the same IP address (relying on unique port numbers to keep them separate); so you should set the cluster address to the same IP address as that of the managed servers.

- b. Click **Next**.

12. In the **Assign Servers to Clusters** window, assign the MS1 and MS2 managed servers to the **MY_CLUSTER** cluster.

- a. In the **Server** pane, click **MS1**. Then, shift+click **MS2**.

- b. Click the right arrow that is situated in between the **Server** and **Cluster** panes.

The names of the managed servers are moved from the **Server** pane to the **Cluster** pane.

- c. Click **Next**.

13. In the **Configure Machines** window, you define the configuration information for the Windows and UNIX machines in the domain. This step is optional.

Note: In this example, all the servers in the domain reside on your local machine, so it is not necessary to set up additional machines and assign target servers to them.

Click **Next**.

14. In the **Configure JDBC Data Sources** window, leave the default settings, and click **Next**.

15. In the **Configure JMS File Stores** window, leave the default settings, and click **Next**.

16. In the **Review WebLogic Domain** window, review the detailed configuration settings of your domain before the Configuration Wizard creates it.

The **Domain Summary** pane shows the **Deployment** view by default. By selecting different options from the **Summary View** drop-down list, you can see different views of the domain summary.

Select an item in the **Domain Summary** pane on the left and review the associated details in the **Details** pane on the right. You can make limited adjustments by clicking **Previous** to return to a previous window.

After reviewing the contents of your domain, click **Next**.

17. In the **Create WebLogic Domain** window, enter a name for the domain and specify a location for the domain directory.

For this example, enter **myclusterdomain** as the name of the domain.

By default, the domain is created in *BEA_HOME\user_projects\domains\domain*, where *BEA_HOME* is the directory that contains the product installation, and *domain* is the domain name that you specify (*myclusterdomain* in this example).

Click **Create**.

18. In the **Creating Domain** window, after the domain has been created, do one of the following:

- If you want to start the server immediately, select the **Start Admin Server** check box and click **Done**. This option is available only for Windows systems.
- If you do not want to start the server at this time, click **Done**.

How Do I...?

This section provides examples for specific tasks using the Configuration Wizard. The topics include:

- [How Do I: Create a WLI Domain Using an Enterprise-Quality Database?](#)
- [How Do I: Create a Portal Domain Using an Enterprise-Quality Database?](#)
- [How Do I: Create an Oracle Service Bus Domain Using an Enterprise-Quality Database?](#)

How Do I: Create a WLI Domain Using an Enterprise-Quality Database?

The following example explains the procedure to create a new Oracle WebLogic Integration domain that uses a database other than the default PointBase database.

1. Start the Configuration Wizard in graphical mode.
 - On Windows:
Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard
 - On UNIX:
Go to the `/common/bin` subdirectory of the product installation directory. For example:
`cd $BEA_HOME/wlserver_10.3/common/bin`
Enter `sh config.sh`

2. In the **Welcome** window, select **Create a new WebLogic domain**, and click **Next**.
3. In the Select a Domain Source window:
 - a. Select **Generate a domain configured automatically to support the following products**.
 - b. Select the **WebLogic Integration** check box.

Note: The **WebLogic Server** check box is selected by default since it is a prerequisite for all Oracle WebLogic domains.
 - c. Click **Next**.
4. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click **Next**. This username is used to boot the Administration Server and connect to it.
5. In the **Configure Server Start Mode and JDK** window, specify the Domain startup mode, JDBC and JDK, click **Next**, and for more information, see [Chapter 3, “Creating a WebLogic Domain.”](#)
6. In the **Customize Environment and Services Settings** window, select **Yes** to modify JDBC Data Source Configurations to specify a non-PointBase database, and click **Next**.
7. In the **Configure the Administration Server** window, define the configuration information for the Administration server, and click **Next**. For more information, see [“Configuring the Administration Server” on page 5-3](#).
8. In the **Configure Managed Servers** window, define the configuration information for one or more managed servers, and click **Next**. For more information, see [“Configuring Managed Servers” on page 5-7](#).
9. In the **Configure Machines** window, define the configuration information for machine or hosts in the domain, and click **Next**. For more information, see [“Configuring Machines” on page 5-11](#).
10. In the Configure JDBC Data Sources window, modify the configuration information for each data source to point to the desired Database type and driver.

Note: Always define p13nDataSource and cgDataSource-nonXA with a non-XA driver. For example, when configuring a domain for Oracle, use Oracle Driver (Type 4) with these data sources.

Note: For every other data source, a tab is displayed in the Configure JDBC Data Sources panel for Database Type and Driver configuration. The remaining data

sources can be defined with either an XA or non-XA Driver, as required. When each data source is configured, click **Test Connections** to display the **Test Data Source Connections** window. Test each database source to verify database connectivity. Go back to the Configure JDBC Data Sources window to check and correct any database connectivity issue before proceeding.

Note: Ensure that the database to which you want to test the connection is running.

Click **Next** to proceed to the **Run Database Scripts** window.

11. In the **Run Database Scripts** window, select the **Log File** check box, and click **Run Scripts** to create WLI Business Process, P13N, and Worklist Data Objects.

Note: In the Results pane, verify that Database Load Successful is returned for each Run Script execution. Otherwise, correct the problem before proceeding.

12. In the **Configure JMS File Store** window, enter any JMS File Store information for the domain, and click **Next**. For more information, see “[Configure JMS File Stores](#)” on [page 7-6](#).
13. In the **Review WebLogic Domain** window, verify the contents of the domain, and click **Next**. For more information, see “[Review the Domain Settings and Create the Domain](#)” on [page 5-14](#).

In the **Create WebLogic Domain** window, type a name and location for your new Oracle WebLogic Integration domain, click **Create**. Once the domain is created, the server for Oracle WebLogic Integration is ready to be started.

How Do I: Create a Portal Domain Using an Enterprise-Quality Database?

The following example explains the procedure to create a new Oracle WebLogic Portal domain that uses a database other than the default PointBase database. For additional information about configuring an Enterprise-Quality Database, see the *WebLogic Portal Database Administration Guide* at the following URL:

http://download.oracle.com/docs/cd/E13219_01/wlp/docs103/db/index.html

1. Start the Configuration Wizard in graphical mode.

- On Windows:

Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard

- On UNIX:

Go to the `/common/bin` subdirectory of the product installation directory. For example:
`cd $BEA_HOME/wlserver_10.3/common/bin`

Enter `sh config.sh`

2. In the **Welcome** window, select **Create a new WebLogic domain**, and click **Next**.
3. In the **Select a Domain Source** window:
 - a. Select **Generate a domain configured automatically to support the following products**.
 - b. Select the **WebLogic Portal** check box.

Note: The **WebLogic Server** check box is selected by default since it is a prerequisite for all Oracle WebLogic domains.
 - c. Optionally, select the **WebLogic Portal GroupSpace Framework** and **WebLogic Portal GroupSpace Application** check boxes to include database resources required for a GroupSpace Community and a pre-configured GroupSpace application, respectively. For more information, see the *WebLogic Portal GroupSpace Guide* at the following URL: http://download.oracle.com/docs/cd/E13219_01/wlp/docs103/groupspace/index.html

Note: The **WebLogic Portal** checkbox is selected by default since it is a prerequisite for WebLogic Portal GroupSpace.
 - d. Click **Next**.
4. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click **Next**. This username is used to boot the Administration Server and connect to it.
5. In the **Configure Server Start Mode and JDK** window, specify the Domain startup mode, JDBC and JDK, click **Next**, and for more information, see [Chapter 3, “Creating a WebLogic Domain.”](#)
6. In the **Customize Environment and Services Settings** window, select **Yes** to modify JDBC Data Source Configurations to specify a non-PointBase database, and click **Next**.
7. In the **Configure the Administration Server** window, define the configuration information for the Administration server, and click **Next**. For more information, see [“Configuring the Administration Server” on page 5-3.](#)

8. In the **Configure Managed Servers** window, define the configuration information for one or more managed servers, and click **Next**. For more information, see “[Configuring Managed Servers](#)” on page 5-7.
9. In the **Configure Machines** window, define the configuration information for machine or hosts in the domain, and click **Next**. For more information, see “[Configuring Machines](#)” on page 5-11.
10. In the **Configure JDBC Data Sources** window, modify the configuration information for each data source to point to the desired Database type and driver. For a list of supported databases and drivers for Oracle WebLogic Portal, see *Supported Database Configurations* at the following URL:
http://download.oracle.com/docs/cd/E12840_01/platform/configs_osb10gr3/osb10gr3/index.html

Please keep the following considerations in mind:

- Each data source for Oracle WebLogic Portal is described in `BEA_HOME/portal/db/jdbc/README.txt`. This Readme file includes additional important information about database specific data source settings and XA JDBC Driver usage. It also describes a process for switching a default PointBase domain to a domain using an Enterprise Quality Database, without using the Configuration Wizard guide to modify each data source.

- **For the MySQL Database:**

The MySQL JDBC driver is not fully XA compatible, therefore Oracle WebLogic Portal does not support using `com.mysql.jdbc.jdbc2.optional.MysqlXADataSource`. Data sources that require XA, and those that are XA capable, should use the `com.mysql.jdbc.Driver` with the `global-transactions-protocol` `LoggingLastResource` instead.

- **For Database Types other than MySQL:**

Always define `portalDataSourceAlwaysXA` with an XA driver. For example, when configuring a domain for Oracle, use Oracle Driver (Type 4 XA).

Always define `p13nDataSource` and `cgDataSource-nonXA` with a non-XA driver. For example, when configuring a domain for Oracle, use Oracle Driver (Type 4) with these data sources.

For every other data source, a tab is displayed in the **Configure JDBC Data Sources** panel for Database Type and Driver configuration. The remaining data sources can be defined with either an XA or non-XA Driver, as required. When each data source is configured, click **Test Connections** to display the **Test Data Source Connections** window. Test each database source to verify database connectivity. Go back to the

Configure JDBC Data Sources window to check and correct any database connectivity issue before proceeding.

Note: If you selected the **WebLogic Portal GroupSpace Framework** check box in step 3, and you want to use a database other than PointBase for the GroupSpace Database, `appsGroupSpaceDataSource` will require data source configuration. For example, to use an Oracle database with the WebLogic Portal GroupSpace Framework configure `appsGroupSpaceDataSource`, to use Oracle Driver (Type 4) and specify a user name and password that is unique for WebLogic Groupspace. For more information, see the *WebLogic Portal Database Administration Guide* at the following URL:

http://download.oracle.com/docs/cd/E12840_01/wlp/docs103/db/oracle.html#wp1070839

Ensure that the database to which you want to test the connection is running.

Click **Next** to proceed to the **Run Database Scripts** window.

11. In the **Run Database Scripts** window, select the **Log File** check box, and then click **Run Scripts** to create both the P13N and Portal Database Objects.

Also, if you selected **WebLogic Portal GroupSpace Framework** in Step 3, select the `appsGroupSpaceDataSource` in **Available JDBC Data Sources**, and then click **Run Scripts** to load the database objects for the **WebLogic Portal GroupSpace Framework**.

Note: In the **Results** pane, verify that **Database Load Successful** is returned for each Run Script execution. Otherwise, correct the problem before proceeding.

12. In the **Configure JMS File Store** window, enter any JMS File Store information for the domain, and click **Next**. For more information, see “[Configure JMS File Stores](#)” on [page 7-6](#).
13. In the **Review WebLogic Domain** window, verify the contents of the domain, and click **Next**. For more information, see “[Review the Domain Settings and Create the Domain](#)” on [page 5-14](#).
14. In the **Create WebLogic Domain** window, enter a name and location for your new WebLogic Portal domain, click **Create**. Once the domain is created, the server for WebLogic Portal is ready to be started.

How Do I: Create an Oracle Service Bus Domain Using an Enterprise-Quality Database?

The following example explains how to create a new Oracle Service Bus domain that uses a database other than PointBase for your JMS Reporting Provider.

1. Start the Configuration Wizard in graphical mode.
 - On Windows:
Start > Programs > Oracle WebLogic > WebLogic Server 10.3 > Tools > Configuration Wizard
 - On UNIX:
Go to the `/common/bin` subdirectory of the product installation directory. For example:
`cd $BEA_HOME/wlserver_10.3/common/bin`
Enter `sh config.sh`
2. In the **Welcome** window, select **Create a new WebLogic domain** and click **Next**.
3. In the **Select a Domain Source** window:
 - a. Select **Generate a domain configured automatically to support the following products**.
 - b. Select the **Service Bus** check box.
Note that the **WebLogic Server** check box is selected by default since it is a prerequisite for all Oracle WebLogic domains.
 - c. Click **Next**.
4. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click **Next**. This username is used to boot the Administration Server and connect to it.
5. In the **Configure Server Start Mode and JDK** window, specify whether to start the server in development mode or production mode, and select which JDK to use. For more information, see [“Specify the Server Start Mode and JDK” on page 4-4](#). Click **Next**.
6. In the **Customize Environment and Services Settings** window, indicate whether you want to change the distribution of your domain across servers, clusters, and machines, or to modify existing JDBC and JMS file store services.

The JMS Reporting Provider in the Service Bus template is preconfigured to use the PointBase database provided with your installation. In this example, we want to select a different database. Select **Yes** and click **Next**.
7. In the **Configure the Administration Server** window, define the configuration information for the Administration Server, including:
 - Administration Server name

- Listen address
- Nonsecure and secure (optional) listen ports

Servers can be reached through the following URL:

protocol://listen-address:listen-port

For more information, see “[Configure the Administration Server](#)” on page 6-2.

In this example, you can either accept the default values, or enter configuration information specific to your Administration Server.

Click **Next** to proceed to the **Configure Managed Servers** window.

8. In the **Configure Managed Servers** window, define the configuration information for one or more Managed Servers. For this example, you do not need to add Managed Servers.

Click **Next** to proceed to the **Configure Machines** window.

9. In the **Configure Machines** window, define the configuration information for the Windows and UNIX machines in the domain. If you intend to use Node Manager, you must create a machine configuration for each product installation that runs a Node Manager process. For this example, you do not need to configure a machine.

Click **Next** to proceed to the **Configure JDBC Data Sources** window.

10. In the **Configure JDBC Data Sources** window, you can modify the configuration information for data sources defined in the template. You can also test the connections to your database.

The JMS Reporting Provider data source (`wlsbjmsrpDataSource`) is preconfigured to use the PointBase database. To use an alternate database, make the following edits in this window:

- In the **Database type** field, select a supported database, such as Oracle, MS SQL, Sybase, or DB2.
- In the **Driver** field, select a supported non-XA driver.

Note: For a list of the supported drivers, see “Supported Database Configurations” in *Supported Configurations for Oracle Service Bus 10g Release 3 (10.3)* at http://download.oracle.com/docs/cd/E12840_01/platform/configs_osb10gr3/osb10gr3/index.html.

- Select the **Supports global transactions** and **Logging last resource** options.
- Complete the remaining required fields as appropriate for your database.

When you have completed all the required fields in this window, click **Test Connections** to display the **Test Data Source Connections** window.

11. In the **Test Data Source Connections** window, you can test the connection to the database for each of the data sources defined in your domain, using the JDBC URL defined for the database.

Note: Make sure that the database to which you want to test the connection is running.

To test the connection from the `wlsbjmsrpDataSource` data source to the database you specified, click **Test**. Verify that the test was successful, then click **OK** to return to the **Configure JDBC Data Sources** window.

Click **Next** to proceed to the **Run Database Scripts** window.

12. In the **Run Database Scripts** window, you set up the database content for each of the data sources defined in your domain using pre-existing SQL or database loading files.

If you selected **Development** for the server start mode in Step 5, the database tables are created automatically when the JMS Reporting Provider is deployed.

If you selected **Production** for the server start mode in Step 5, you must execute the database scripts to create the JMS Reporting Provider tables, as described below. To do so:

- a. In the **Available JDBC Data Sources** pane, select `wlsbjmsrpDataSource`.
- b. The **Available Sql Files And Database Loading Options** pane displays all the scripts available in the data source. Select the scripts to run, by checking or unchecking the check box associated with the scripts.
- c. Select the database version from the **DB Version** drop-down menu.
- d. To create a log file, select the check box associated with **Log File**. Specify the location of the log file. The default location of the log file is
`BEA_HOME\wlserver_10.3\common\lib\jdbc.log`
where: `BEA_HOME` is the directory containing the product installation.
- e. Click **Run Scripts**.
To confirm that the tables were created successfully, review the results in the **Results** pane.
- f. Click **Next**.

13. In the **Configure JMS File Store** window, you can modify JMS file stores that are configured in your domain.

In this example, you do not need to modify the JMS file store definition.

Click **Next**.

14. In the **Review WebLogic Domain** window, review the detailed configuration settings of your domain before the Configuration Wizard creates the domain.

The **Domain Summary** pane shows the Deployment view by default. By selecting different options from the Summary View drop-down list, you can see different views of the domain summary, for example, the Cluster view.

Select an item in the **Domain Summary** pane on the left and review the associated details in the **Details** pane on the right. You can make limited adjustments by clicking **Previous** to return to a prior window.

After reviewing the contents of your domain, click **Next** to go to the **Create WebLogic Domain** window.

15. In the **Create WebLogic Domain** window, enter a name for the domain and specify a location for the domain directory.

For example, you may want to name this `servicebus_domain`.

By default, the domain is created in `BEA_HOME\user_projects\domains\domain`, where `BEA_HOME` is the directory that contains the product installation, and `domain` is the domain name that you specify (`servicebus_domain` in this example). Click **Create**.

16. In the **Creating Domain** window, once the domain has been created, do one of the following:
 - If you are creating the domain on a Windows system and you want to start the server immediately, select the **Start Admin Server** check box and click **Done**.
 - Click **Done**.